



REAL TIME CLOCK RTC- 1048

TECH SPECS

Model	RTC 1048
Dimension (HxWxD) mm	96 x 96 x 52
Panel Cutout	92 x 92
Range	23:59:59 Hrs/Min/Sec
Output	1 Relay 1 C/O
Power Supply	100-270V AC, 50/60 HZ

APPLICATIONS

Street Light

Garden Light

Signages/Hoardings

Escalators

Automation Light

Technical Specifications

Physical	
	RTC-1048
Color	Black
Front Bezel (mm)	96 x 96
Panel cutout (mm)	92 x 92
Depth behind panel	52 mm
Accessories	1 pair of Mounting clamp
Terminal Cable Size	Barrier Type terminal Cable Size (2.5 mm ²)

Output	
Relay Control Output	
Relay	1 Nos.
Rating	5A @230V AC / 28V DC Resistive Load


Power Supply	
Standard	100 - 270V AC @ 50/60 Hz
Consumption	5VA

Display	
Process Value	Upper : 8 Digit 7 seg 0.39",Red LED Display Lower : 4 Digit 7 seg 0.39",Green LED Display
Keys	SET, SHIFT, UP, ENT/RESET
LED Indication	Relay Indication

Program
16 Program ON/OFF Time

Environmental	
Operating Temperature	0 to 55 °C
Storage Temperature	0 to 70 °C
Humidity	95% RH Non-condensing
Protection	IP 54 (Front Side)

Outline Dimension (mm)	Panel Cutout Dimension (mm)

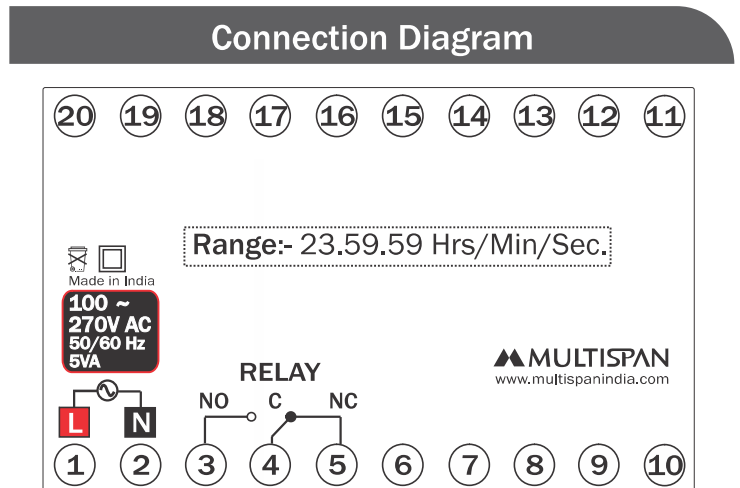

We reserves the right to change specifications without prior notice. Printing and typographical errors reserved.

Product improvement and upgrade is a constant procedure. So for more updated operating information & support contact us. Mimic Components (0)11-689-5700