




AD30V/RYG



AD30V/W

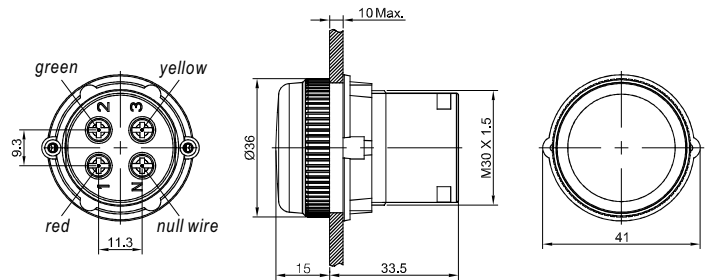

Specification

Terminal type: Screw (for wire 1.5mm² Max.)

Voltage between 2 phases: 380V±20%

Voltage between phase & neutral: 220V±20%

Frequency: 50/60Hz


Power frequency withstand voltage: 1890VAC 50Hz
(between live part and contactable surface)

Torque: 0.8Nm


Operating temperature: -20°C~+55°C

Base Material: PA

Hole Size



Gasket Size



Diagram

