




MEASUREMENT & CONTROL WITH OPTIMUM PERFORMANCE



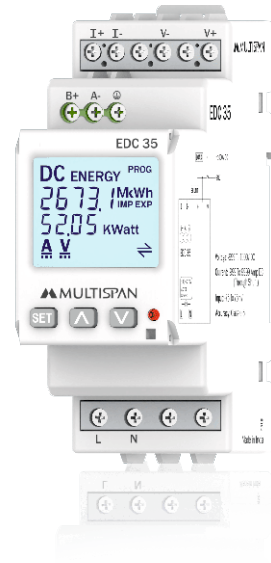


OUR FOCUS

Provide user-friendly accurate solutions in a way it makes a difference for every industry

USER-FRIENDLY & ACCURATE SOLUTIONS

Multispan is a leading company involved in the development and production of PID Temperature Controllers, Power & Energy Meters, Protection Relays, Timers & Counters as well as customised solutions for various industrial applications. As an owner-managed family business, we employ about 450+ staff with 75+ domestic channel sales partner network in India plus product distribution in 25+ countries.

With marked customer orientation, consistently high quality and vast innovation capability, Multispan develops specific solutions for many industries and applications

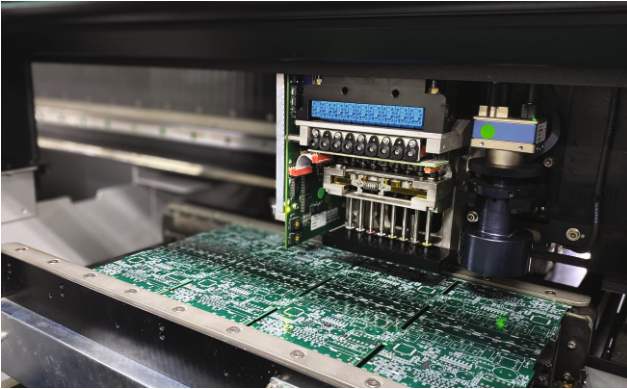

Electronic **Assembly**




Plastic Enclosure **Manufacturing**



Testing & Quality **Control**

Reliability **Laboratory**

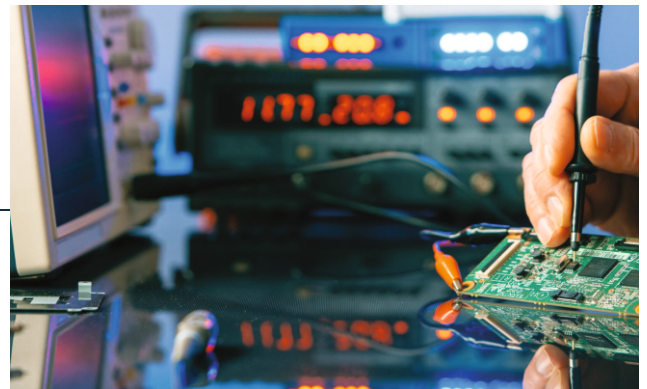

INFRASTRUCTURE

Established in 1986, Multispan has grown significantly as a professionally managed organization. The company has a proven track record of performance & quality of its products till date. Over the years, Multispan has developed proficiency in product design, product development & product testing, with vertically integrated manufacturing facility, infrastructure & a cutting edge, 30-member strong R&D division, with over 3000 software applications, 200+ standard products & 100+ customized products.

Applications

Our entire product range has varied industrial applications from complex ones like value-controlling to maintain temperature for accurate plastic sealing of food containers to complex IIoT solutions for accurate energy measurement, till serving all kinds of industries.




Extrusion Plants



Textile Machinery



Process Industries



Packaging Machinery



Stone Cutting Machinery



Lab Testing Equipements



Food Processing



Pharmaceutical Applications



Printing Machinery



LT, HT Panel




Submersible Pumps & Motor Panel




Power Distribution Panel



Boiler and Auxiliary Equipments



Testing Chambers



DG Sets



System Integration & Automation



HVAC & Refrigeration Industries

Table of Contents

Process Control Instruments.....	01
Temperature Controllers.....	09
Cooling Controllers.....	19
Programmable Timers.....	21
Programmable Counters.....	26
Protection Relays.....	30
Power & Energy Meters.....	41
Power Supplies.....	50
Jumbo Displays.....	51

Process Control Instruments

16 Channel Scanner with RS-485 Modbus & USB Connectivity

Upto 8 Relay Outputs, Data Logging with Pen Drive compatibility (USB)

Model		MS-5716RU-M1	
Dimension (HxWxD)mm		192 x 96 x 169	
Panel Cutout (mm)		188 x 92	
INPUT	Sensor	J / K / PT-100 2 Wire or 3 Wire	
	Analog	0-10V DC / 4-20mA DC / 0-20mA DC (Configurable)	
	Range	J (0 °C - 400 °C) , K (0 °C - 1200 °C) , PT-100 2 Wire or 3 Wire (-99 °C to 400 °C, -99.9 °C to 400.0 °C For Temperature I/P) (-999 to 9999 For analog I/P)	
OUTPUT	Output 1	RS-485 Modbus Communication (Optional)	
	Output 2	8 Relay with Grouping Facility (Optional)	
	Output 3	USB Port with Data Logging Facility (Optional)	
	Accuracy	±1% of Full Scale ±1 Digit	
Supply		100 - 270V AC/DC (SMPS), 50/60Hz	



Model		MS-L14
Dimension (HxWxD)mm		96 x 96 x 71
Panel Cutout (mm)		92 x 92
INPUT	Sensor	J / K / PT-100 2 Wire or 3 Wire (Configurable)
	Analog	0-10V DC / 4-20mA DC / 0-20mA DC (Configurable)
	Range	J (0°C - 600°C), K (0°C - 1200°C), PT-100 2 Wire or 3 Wire (-99°C - 400°C, -99.9°C - 400.0°C)
OUTPUT	Output 1	4 Relay with Grouping Facility
	Output 2	RS-485 Modbus Communication (Optional)
Control Action		ON / OFF
Accuracy		±1% of Full Scale ±1 Digit
Supply		20 to 36V DC

Process Control Instruments

8 Channel Scanner with RS-485 Modbus Connectivity

8 Channel Indicator



Model	MS-1208		MS-1208A	
Dimension (HxWxD)mm	96 x 96 x 54		96 x 96 x 54	
Panel Cutout (mm)	92 x 92		92 x 92	
INPUT	Inputs	J / K / PT-100 2 Wire or 3 Wire (Configurable)		0 - 10V DC / 4 - 20mA DC / 0 - 20mA DC (Configurable)
	Range	J (0°C - 400°C) , K (0°C - 1200°C), PT-100 2 Wire or 3 Wire (-99.9°C - 400.0°C)		-999 to 9999
OUTPUT	RS-485 Modbus Communication (Optional)			
Accuracy	±1% of Full Scale ±1 Digit			
Supply	100 - 270V AC/DC (SMPS), 50/60Hz			

8 Channel Scanner with RS-485 Modbus Connectivity

Upto 4 Channel Outputs, [Data Logging with Pen Drive Compatibility \(USB\)](#)



Model		MS-1248U	MSU-1248U
Dimension (HxWxD)mm		96 x 96 x 70	96 x 96 x 70
Panel Cutout (mm)		92 x 92	92 x 92
INPUT	Input	J / K / PT-100 2 Wire or 3 Wire (Configurable)	J / K / PT-100 2 Wire or 3 Wire / 0 to 10V DC / 4 to 20mA DC / 0 to 20mA DC (Configurable)
	Range	J (0°C - 600°C), K (0°C - 1200°C), PT-100 2 Wire or 3 Wire (-99°C - 400°C, -99.9°C - 400.0°C)	J (0°C - 400°C), K (0°C - 1200°C), PT-100 2 Wire or 3 Wire (-99.9°C - 400.0°C For Temperature I/P) (-999 to 9999 Analog I/P)
OUTPUT	Output 1	4 Relay with Grouping Facility	
	Output 2	RS-485 Modbus Communication (Optional)	
	Output 3	USB Port with Data Logging Facility (Optional)	
Control Action		ON / OFF	
Accuracy		±1% of Full Scale ±1 Digit	
Supply		100 - 270V AC/DC (SMPS), 50/60Hz	

Product Catalog 2025102

Scanner Model Selection Guide

Sr.No.	Model	Channel	Input - 1 J/K/PT-100	Input - 2 4-20mA/0-20mA/0-10V DC	Output Relay	Output RS-485	Output USB Port
1	MS-1208	8	✓				
2	MS-1208-M1	8	✓			✓	
3	MS-1208A	8		✓			
4	MS-1208A-M1	8		✓		✓	
5	MS-1248	8	✓		4		
6	MS-1248-M1	8	✓		4	✓	
7	MS-1248U	8	✓		4		✓
8	MS-1248U-M1	8	✓		4		✓
9	MSU-1248	8	✓	✓	4		
10	MSU-1248-M1	8	✓	✓	4	✓	
11	MSU-1248U	8	✓	✓	4		✓
12	MSU-1248U-M1	8	✓	✓	4	✓	✓
13	MSU-1244-M1	4	✓	✓	4	✓	
14	MSU-1244	4	✓	✓	4		
15	MSU-1244U	4	✓	✓	4		✓
16	MSU-1244U-M1	4	✓	✓	4	✓	✓
17	MS-5716	16	✓	✓			
18	MS-5716R	16	✓	✓	8		
19	MS-5716-M1	16	✓	✓		✓	
20	MS-5716U	16	✓	✓			✓
21	MS-5716R-M1	16	✓	✓	8	✓	
22	MS-5716RU	16	✓	✓	8		✓
23	MS-5716U-M1	16	✓	✓		✓	✓
24	MS-5716RU-M1	16	✓	✓	8	✓	✓



Model		MFC-1058	MFC-3086-M1
Dimension (HxWxD)mm		96 x 96 x 54	96 x 96 x 85
Panel Cutout (mm)		92 x 92	46 x 92
INPUT	Input	4 to 20mA DC / 0 to 10V DC / Pulse (Factory Set)	Proxy NPN/PNP (Selectable)
	Range	0 to 99999999 For Total Flow 0 to 99999 For Flow Rate	0 to 99999999 for Total Flow 0 to 999999 for Flowrate
OUTPUT	Output 1	4-20mA DC / 0-10V DC Retransmission (Factory Set) (Optional)	4-20mA DC / 0-10V DC Retransmission (Factory Set) (Optional)
	Output 2	24V DC Transmitter Supply@30mA (by default)	24V DC Transmitter Supply@30mA (For Analog Input)
	Output 3	1 Relay / 2 Relay 5A, 230V AC (Resistive Load) (1 Relay by default)	1 Relay / 2 Relay 5A, 230V AC (Resistive Load) (1 Relay by default)
	Output 4	RS-485 Modbus Communication (Optional)	RS-485 Modbus Communication (Optional)
Accuracy		±1% of Full Scale ±1 Digit	
Supply		100 - 270V AC (SMPS), 50/60Hz or 24V DC (Factory Set)	

Load Cell Indicator / Controller



Model		LD-1252
Dimension (HxWxD)mm		96 x 96 x 54
Panel Cutout (mm)		92 x 92
INPUT	Input	0 - 20mV DC / 0 - 30mV DC from load cell (Factory Set)
	Range	0 to 99999
OUTPUT		1 Relay & 2 Relay (1 Relay by default) 10V DC@100mA DC Load cell supply (by default) 0 - 10V DC / 4 - 20mA DC Retransmission (Any One Factory Set) (Optional) RS-485 Modbus (Optional)
Accuracy		±1% of Full Scale ±1 Digit
Supply		100 to 270V AC (SMPS), 50/60Hz

Process Control Instruments

Signal Isolators




Model	MI-431		MI-532	MI-631 / MI-632
Dimension (HxWxD)mm	100 x 12.5 x 115		100 x 17.5 x 115	76 x 28 x 85
Panel Cutout (mm)	Din Rail Mounting		Din Rail Mounting	Din Rail Mounting
INPUT	Analog : 0 - 20mA DC / 4 - 20mA DC / 0 - 10V DC (Factory set)			0 - 20mA DC / 4 - 20mA DC / 0 - 10V DC / -5 to 5V DC / 0 - 300V DC (Factory Reset) Resistance 2 Wire or 3 Wire port
OUTPUT	0 - 20mA DC / 4 - 20mA DC / 0 - 10V DC, Single Output (Factory Set) 24V DC Transmitter Supply		0 - 20mA DC / 4 - 20mA DC / 0 - 10V DC, Dual Output (Factory Set) 24V DC Transmitter Supply	0 - 20mA DC / 4 - 20mA DC / 0 - 10V DC, (Single Output or Dual Output) (Factory Set)
Accuracy	±0.2% of Full Scale			
Supply	100 - 270V AC/DC (SMPS), 50/60Hz or 24V DC (Factory Set)			



Model	MI-631T / MI-632T		MI-631P / MI-532P
Dimension (HxWxD)mm	76 x 28 x 85 / 76 x 28 x 85		76 x 28 x 85 / 100 x 17.5 x 115
Panel Cutout (mm)	Din Rail Mounting		Din Rail Mounting
INPUT	Sensor	J / K Type	PT-100 2 Wire or 3 Wire
OUTPUT	0 - 20mA DC / 4 - 20mA DC / 0 - 10V DC (Single or Dual Output) (Factory set)		
Accuracy	±1% of Full Scale		±0.25% of Full Scale
Supply	100 - 270V AC/DC (SMPS), 50/60Hz or 24V AC/DC (Factory Set)		

Process Control Instruments

Voltage & Current Transducers



Model	CTR-63 / CTR-632	VTR-63 / VTR-632
Dimension (HxWxD)mm	76 x 28 x 85	76 x 28 x 85
Mounting	Din Rail Mounting	Din Rail Mounting
INPUT	0 to 5A AC, 0 to 1A AC (Factory Set)	AC Voltage
OUTPUT	0 - 20mA DC / 4 - 20mA DC / 0 - 10V DC (Single or Dual Output) (Factory Set)	0 - 20mA DC / 4 - 20mA DC / 0 - 10V DC (Single or Dual Output) (Factory Set)
Accuracy	$\pm 0.2\%$ of Full Scale	
Supply	100 - 270V AC/DC (SMPS), 50/60Hz or 24V AC/DC (Factory Set)	

Loop Powered Transmitter



Model	LPT-45	LPT-63
Dimension (HxWxD)mm	Diameter : 45mm	76 x 28 x 85
Panel Cutout (mm)	Head Mounting	Din Rail Mounting
INPUT	Input	Fix Range
Range	PT-100 3 Wire / J / K (Factory Set)	
OUTPUT	PT-100 : 0 to 100 / 0 to 200 / 0 to 300 / 0 to 400 (Configurable) / Fix Range	
Supply	4 - 20mA DC Signal (2 Wire System)	
	24V DC Loop Powered	

Process Control Instruments

Fault Annunciator

Upto 10 Fault Inputs & 3 Outputs



Touch
Screen



PC INTERFACE SOFTWARE

Model	FLT L16
Dimension (HxWxD)mm	96 x 96 x 54
Panel Cutout (mm)	92 x 92
INPUT	16 Input potential free contact
OUTPUT	2 Relay 1C/O for Audio alarm & Machine Trip & RS 485 Modbus
Supply	100 - 270V AC/DC, 50/60Hz (Factory Set)
Key Features	Fault Type NO or NC Configurable, Last 5 fault history with RTC, Individual Faultwise history with RTC

Dual Process Indicator



Model	DPI-122	DPI-1824
Dimension (HxWxD)mm	96 x 96 x 54	96 x 96 x 54
Panel Cutout (mm)	92 x 92	92 x 92
INPUT	Input 1 & 2	J / K / PT-100 2 Wire or 3 Wire
	PT-100 3 Wire / 4 - 20mA DC / 0 - 20mA DC / 0 - 10V DC (Any two factory set)	0 - 10V DC / 4 - 20mA DC / 0 - 20mA DC (Configurable)
	Range	-999 to 9999 for Analog I/P, PT-100 (0.0°C - 400.0°C)
		-999 to 9999 for Analog Input J (0°C to 600°C) , K (0°C to 1200°C), PT-100 2 Wire or 3 Wire (-99°C to 400°C, -99.9°C to 400.0°C) For Temperature Sensor
OUTPUT	1 Relay / 2 Relay (Optional) 24V DC Transmitter Supply@30mA (Optional) RS-485 Modbus (Optional)	4 Relay + 2 Retransmission + 24V DC Transmitter@30mA DC
Control Action	ON - OFF	
Accuracy	±1% of Full Scale ±1 Digit	
Supply	100 - 270V AC (SMPS), 50/60Hz	
Note	RS-485 Modbus Optional in DPI-122	

Process Control Instruments

Process Indicators



Model		PI-38	PI-21	PI-41
Dimension (HxWxD)mm		48 x 96 x 29	72 x 72 x 36	48 x 48 x 46
Panel Cutout (mm)		46 x 92	68 x 68	45 x 45
INPUT	Input	0 - 10V DC / 0 - 20mA DC / 4 - 20mA DC (Configurable)		
	Range	-999 to 9999 for Analog Input		
Display Resolution		0.000 / 00.00 / 000.0 / 0000 (Configurable , For Analog Input)		
Features		Correction Factor , Offset , Filtration Rate , Reverse Scaling		
Supply		100 - 270V AC (SMPS), 50/60Hz		

Process Controllers



Model		PIC-1101	PIC-38	PIC-4202
Dimension (HxWxD)mm		96 x 96 x 54	96 x 96 x 68	48 x 48 x 95
Panel Cutout (mm)		92 x 92	46 x 92	45 x 45
INPUT	Input	0 to 10V DC / 4 to 20mA DC / 0 to 20mA DC (Configurable)		
	Range	-999 to 9999 (Configurable)		
OUTPUT	Output 1	1 Relay (By Default)		2 Relay (By Default)
	Output 2	2 Relay (Optional)		
	Output 3	24V DC Transmitter Supply@30mA (By Default)		24V DC Transmitter Supply@30mA
	Output 4	4 to 20mA / 0 to 20mA DC Retransmission Output (Factory Set) (Optional)		NA
	Output 5	RS-485 Modbus (Optional)		
Operating Mode		High / Low / Inband / Outband / Absolute Low / Absolute Outband Alarm (configurable)		
Accuracy		±1% of Full Scale ±1 Digit		
Supply		100 - 270V AC (SMPS), 50/60Hz		

Temperature Controllers

PID Temperature Controller with Built in Ampere Indication



Model	PID-2303-1C/3C (With CT Module)		PID-4203-1C (With CT Module)
Dimension (HxWxD)mm	72 x 72 x 85		48 x 48 x 111
Panel Cutout (mm)	68 x 68		45 x 45
INPUT	Input	J / K (Configurable) or PT-100 (Factory Set) + CT Input	J / K/PT-100 (Configurable) + CT Input
	Range	J (0 °C to 400 °C), K(0 °C to 500 °C)	J (0 °C to 600 °C), K(0 °C to 1200 °C) PT-100 2 Wire or 3 Wire (-99 °C to 400 °C , -99.9 °C to 400.0 °C)
CT INPUT	1 CT (60A DinRail Mounting) 3 CT (60A DinRail Mounting)		
OUTPUT	3 Relay 1st Relay Parallel SSR + 2nd O/P Relay or SSR + 3rd O/P Relay or SSR (3 Relay 1C/O 5A 230V AC Resistive Load) SSR Drive O/P 24V DC 20mA RS-485 Modbus Communication (Optional)		3 Relay 1C/O 5A, 230V AC (Resistive Load) or 3SSR Drive O/P 12V DC, 20mA (Factory Set) (3 Set Point) (Heat + Cool + Alarm)
Control Action	PID / ON-OFF (Configurable)		
Accuracy	±1% of Full Scale ±1 Digit		
Supply	100 - 270V AC/DC (SMPS), 50/60Hz		
Note	Analog 4-20mA DC or 0-10V DC Controlling Output Available (Optional) in PID 2303A-1C/3C 1 CT Input & 1 Relay SSR Option Available in PID 2301-1C		

Motor Synchronizer



Model	SN-126-4
Dimension (HxWxD)mm	75 x 45 x 110
Panel Cutout (mm)	Din Rail Mounting
INPUT	3 Wire / POT Resistance
OUTPUT	1 Relay For Zeroing Facility, 0 - 10V DC (4/5/6) Channel
Supply	230V AC, ±20%, 50Hz

Temperature Controllers

Universal Programmable Controller

Auto Tune PID, RS-485 Modbus Facility



Model	PTC-1202A-M1	PTC-4202A-M1	PTC-382A-M1
Dimension (HxWxD)mm	96 x 96 x 54	48 x 48 x 111	96 x 96 x 85
Panel Cutout (mm)	92 x 92	45 x 45	46 x 92
INPUT	Input	J / K / PT-100 2 Wire or 3 Wire, 0 - 10V DC / 4 - 20mA / 0 - 20mA (Configurable)	
	Range	J (0°C to 600°C) , K (0°C to 1200°C), PT-100 2 Wire or 3 Wire (-99°C to 400°C, -99.9°C to 400.0°C) , (-999 to 9999 for Analog Input)	
OUTPUT	Output 1	1 Relay 1C/O 5A,230V AC (Resistive Load) or SSR Drive O/P 12V DC, 20mA (Factory Set)	
	Output 2	1 Relay 1C/O 5A,230V AC (Resistive Load) or SSR Drive O/P 12V DC, 20mA (Factory Set)	
	Output 3	0 - 10V DC / 4 - 20mA DC (Factory Set) (Controlling / Retransmission Selection)	
Communication		RS-485 Modbus Communication (Optional)	
Control Action		PID / ON-OFF (Configurable)	
Accuracy		±1% of Full Scale ±1 Digit	
Supply		100 - 250V AC (SMPS), 50/60Hz	



Model	PTC-352A-M1 (5 Digit)	UTC-4201A
Dimension (HxWxD)mm	48 x 96 x 85	48 x 48 x 95
Panel Cutout (mm)	46 x 92	45 x 45
INPUT	Input	J / K / PT-100 2 Wire or 3 Wire
	Range	J (0°C - 600°C), K (0°C - 1200°C), PT-100 (-99°C - 400°C, -99.9°C - 400.0°C)
OUTPUT	Output 1	1 Relay 1C/O 5A,230V AC (Resistive Load) or SSR Drive O/P 12V DC, 20mA (Factory Set)
	Output 2	0 - 10V DC / 4 - 20mA DC (Factory Set) (Controlling / Retransmission Selection)
	Output 3	1 Relay 1C/O 5A,230V AC (Resistive Load) or SSR Drive O/P 12V DC, 20mA (Factory Set)
Communication		RS-485 Modbus Communication (Optional)
Control Action		PID / ON-OFF (Configurable)
Accuracy		±0.25% of Full Scale ±1 Digit
Supply		100 - 250V AC (SMPS), 50/60Hz

PTC Model Selection Guide

Sr. No.	Model	Display	Size (HxWxD)mm	Output 1	Output 2	Output 3	Output RS-485
1	PTC-1202	LED	96 x 96 x 54	Relay	Relay	-	-
2	PTC-1202A	LED	96 x 96 x 54	4-20mA/0-10V DC	Relay	Relay	-
3	PTC-1202-M1	LED	96 x 96 x 54	Relay	Relay	-	✓
4	PTC-1202A-M1	LED	96 x 96 x 54	4-20mA/0-10V DC	Relay	Relay	✓
5	PTC-4202	LED	48 x 48 x 95	Relay	Relay	-	-
6	PTC-4202A	LED	48 x 48 x 111	4-20mA/0-10V DC	Relay	Relay	-
7	PTC-4201-M1	LED	48 x 48 x 95	Relay	-	-	✓
8	PTC-4202-M1	LED	48 x 48 x 111	Relay	Relay	-	✓
9	PTC-4202A-M1	LED	48 x 48 x 111	4-20mA/0-10V DC	Relay	Relay	✓
10	PTC-382	LED	48 x 96 x 85	Relay	Relay	-	-
11	PTC-382A	LED	48 x 96 x 85	4-20mA/0-10V DC	Relay	Relay	-
12	PTC-382-M1	LED	48 x 96 x 85	Relay	Relay	-	✓
13	PTC-382A-M1	LED	48 x 96 x 85	4-20mA/0-10V DC	Relay	Relay	✓
14	PTC-352	LED	48 x 96 x 85	Relay	Relay	-	
15	PTC-352A	LED	48 x 96 x 85	4-20mA/0-10V DC	Relay	Relay	
16	PTC-352-M1	LED	48 x 96 x 85	Relay	Relay	-	✓
17	PTC-352A-M1	LED	48 x 96 x 85	4-20mA/0-10V DC	Relay	Relay	✓

Note : Analog Output 0 - 10V DC or 4 - 20mA DC, any one fixed. Please confirm while order is placed.

Temperature Controllers

Humidity + Temperature Controller



Model		RHC-1202 (Humidity Controller)	MHT-1202 (Humidity + Temperature Controller)
Dimension (HxWxD)mm		96 x 96 x 54	96 x 96 x 54
Panel Cutout (mm)		92 x 92	92 x 92
INPUT	Input	Humidity Sensor	S-1 : PT-100 2 Wire or 3 Wire (RTD) S-2 : Humidity Sensor
	Range	0.0 to 100.0% RH	PT-100 2 Wire or 3 Wire (-50 °C to 199.9 °C) Humidity Sensor (0.0 to 100.0% RH)
OUTPUT		2 Relay 1C/O, 5A@230V AC (Resistive Load)	1 st Relay for Temperature and 2 nd Relay for Humidity RS-485 Modbus (Optional)
Control Action		ON - OFF	
Accuracy		±1% of Full Scale ±1 Digit	
Supply		100 - 270V AC (SMPS), 50/60Hz	

9 Stage Profile Controller



Model		PRC-1202
Dimension (HxWxD)mm		96 x 96 x 110
Panel Cutout (mm)		92 x 92
INPUT	Input	J / K / PT-100 2 Wire or 3 Wire (Factory Set)
	Range	J (0 °C to 600 °C), K (0 °C to 1200 °C), PT-100 2 Wire or 3 Wire (-99 °C to 400 °C , 0.0 °C to 400.0 °C)
OUTPUT		2 Relay 1C/O (set point), 2 nd Relay for Alarm
Control Action		ON - OFF
Accuracy		±1% of Full Scale ±1 Digit
Supply		100 - 250V AC (SMPS), 50/60Hz

Temperature Controllers

Temperature Controller - Universal

Double Display PID Controller - 3 Relay



Model		UTC-4203	UTC-3203
Dimension (HxWxD)mm		48 x 48 x 95	96 x 48 x 85
Panel Cutout (mm)		45 x 45	92 x 46
INPUT	Input	J / K / PT-100 2 Wire or 3 Wire (Configurable)	
	Range	J (0 °C to 600 °C), K(0 °C to 1200 °C) PT-100 2 Wire or 3 Wire (-99 °C to 400 °C, -99.9 °C to 400.0 °C)	
OUTPUT		3 Relay 1C/O 5A, 230V AC (Resistive Load) or SSR Drive O/P 12V DC, 20mA (3 Set Point) (Factory Set)	
Control Action		PID / TP / ON-OFF (Configurable)	
Accuracy		±1% of Full Scale ±1 Digit	
Supply		100 - 270V AC (SMPS), 50/60Hz	

Temperature Controllers

Single Display PID - Economy Range



Model	UTC-114	UTC-214	UTC-413P
Dimension (HxWxD)mm	96 x 96 x 43	72 x 72 x 45	48 x 48 x 70
Panel Cutout (mm)	92 x 92	68 x 68	45 x 45
INPUT	Input	J / K / PT-100 2 Wire or 3 Wire (Configurable)	
	Range	J (0 °C to 400 °C or 0 to 600 °C) , K (0 °C to 1200 °C) , PT-100 2 Wire or 3 Wire (-99.9 to 400.0 °C)	J (0 °C to 600 °C) , K (0 °C to 999 °C) , PT-100 (-99 to 400 °C), PT.1 (-19.9 to 99.9 °C)
OUTPUT	1 Relay 1C/O 5A, 230V AC (Resistive Load) & SSR Drive O/P 12V DC, 30mA (Parallel to Relay) (1 set Point)		
Control Action	PID / ON-OFF		
Accuracy	±1% of Full Scale ±1 Digit		
Supply	100 - 270V AC (SMPS), 50/60Hz		

Temperature Controllers

Dual Output & Autotune PID Controller - Full Featured



Model	UTC-1202G+	UTC-2202G+	UTC-4202G+	UTC-3202
Dimension (HxWxD)mm	96 x 96 x 54	72 x 72 x 85	48 x 48 x 95	96 x 48 x 85
Panel Cutout (mm)	92 x 92	68 x 68	45 x 45	92 x 46
INPUT	Input Thermocouple : J / K / R / S / E / N / T / B, RTD : PT-100 2 Wire Or 3 Wire (configurable)			J / K / PT-100 2 Wire or 3 Wire (Configurable)
OUTPUT	Output 1 1 Relay 1C/O 5A, 230V AC (Resistive Load) Parallel SSR Drive O/P 12V DC, 20mA Output 2 1 Relay 1C/O 5A, 230V AC (Resistive Load) or SSR Drive O/P 12V DC, 20mA			
Operating Mode	Heat / Cool / Alarm			
Alarm	High / Inband / Absolute Low / Absolute Outband / Outband / End Alarm / Low Alarm Outband + Soak Timer			
Control Action	PID / TP / ON-OFF (Configurable)			
Accuracy	±0.5% of Full Scale ±1 Digit			
Supply	100 - 270V AC/DC (SMPS), 50/60Hz			

Temperature Controllers

Single Output + Autotune PID Controller



Model	UTC-121G+	UTC-221G+	UTC-421G+	UTC-321P
Dimension (HxWxD)mm	96 x 96 x 54	72 x 72 x 85	48 x 48 x 95	96 x 48 x 85
Panel Cutout (mm)	92 x 92	68 x 68	45 x 45	92 x 46
INPUT	Input Thermocouple : J / K / R / S / E / N / T / B, RTD : PT-100 2 Wire Or 3 Wire (configurable)			J / K / PT-100 2 Wire or 3 Wire (Configurable)
OUTPUT	1 Relay 1C/O 5A, 230V AC (Resistive Load) & SSR Drive O/P 12V DC, 20mA (Parallel to Relay) (1 Set Point)			
Control Action	PID / ON-OFF (Configurable)			
Accuracy	±0.5% of Full Scale ±1 Digit			
Supply	100 - 270V AC/DC (SMPS), 50/60Hz			

Temperature Controllers

Double Display PID Controller



Model		UTC-121P	UTC-221P	UTC-421P
Dimension (HxWxD)mm		96 x 96 x 43	72 x 72 x 45	48 x 48 x 70
Panel Cutout (mm)		92 x 92	68 x 68	45 x 45
INPUT	Input	J / K / PT-100 2 Wire or 3 Wire (Configurable)		
	Range	J (0 °C to 600°C), K (0 °C to 999°C), PT-100 2 Wire or 3 Wire (-99 °C to 400 °C) (-19.9 °C to 99.9 °C)		
OUTPUT		1 Relay 1C/O 5A, 230V AC (Resistive Load) or SSR Drive O/P 12V DC, 30mA (Parallel to Relay) (1 Set Point)		
Control Action		PID / TP / ON-OFF (Configurable)		
Accuracy		±1% of Full Scale ±1 Digit		
Supply		100 - 270V AC (SMPS), 50/60Hz		



Model	TC-421P		TC-442	TC-443
Dimension (HxWxD)mm	48 x 48 x 70		48 x 48 x 70	48 x 48 x 70
Panel Cutout (mm)	45 x 45		45 x 45	45 x 45
INPUT	Input	J / K Type		
	Range	J (0°C to 600°C), K (0°C to 900°C),		
OUTPUT	1 Relay 1C/O 5A, 230V AC (Resis. Load) & SSR Drive O/P 12V DC, 30mA (Parallel to Relay) (1 Set Point)		2 Output : (SSR Parallel to 1 st Relay) + 1 Relay (2 Relay 1C/O 5A, 230V AC (Resis. Load) & SSR Drive O/P 12V DC, 20mA)	3 Output : (SSR Parallel to 1 st Relay) + 2 Relay (3 Relay 1C/O 5A, 230V AC (Resis. Load) & SSR Drive O/P 12V DC, 20mA)
Control Action	PID / ON-OFF (Configurable)			
Accuracy	±1% of Full Scale ±1 Digit			
Supply	100 - 270V AC (SMPS), 50/60Hz			

Temperature Controllers

Digital Temperature Controller

(Fixed Input)



Model	TC-19	TC-29	TC-49
Dimension (HxWxD)mm	96 x 96 x 43	72 x 72 x 45	48 x 48 x 70
Panel Cutout (mm)	92 x 92	68 x 68	45 x 45
INPUT	Input J / K / R / S / PT-100 2 Wire or 3 Wire (Factory Set)		J / K (Configurable) or PT-100 2 Wire or 3 Wire (Factory set)
	Range J (0°C to 400°C or 0°C to 600°C) , K (0°C to 1200°C), PT-100 2 Wire or 3 Wire (0°C to 400°C, -50.0°C to 200.0°C)		J (0°C to 600°C) , K (0°C to 999°C), PT-100 (-50°C to 400°C)
OUTPUT	1 Relay 1C/O 5A, 230V AC (Resistive Load) or SSR (Factory Set)		1 Relay 1C/O 5A, 230V AC (Resistive Load) or SSR Drive O/P 12V DC, 20mA (Parallel to Relay)
Control Action	TP / ON-OFF (Configurable)		
Accuracy	±1% of Full Scale ±1 Digit		
Supply	100 - 270V AC (SMPS), 50/60Hz		

PID Temperature Controller

Economy Range



Model	TC-29P	TC-221P	TC-49P
Dimension (HxWxD)mm	72 x 72 x 45	72 x 72 x 45	48 x 48 x 70
Panel Cutout (mm)	68 x 68	68 x 68	45 x 45
INPUT	Input J / PT-100 2 Wire or 3 Wire (Factory Set)		J / K (Configurable) or PT-100 2 Wire or 3 Wire (Factory set)
	Range J (0°C to 400°C) PT-100 2 Wire or 3 Wire (0°C to 400°C)		J (0°C to 600°C) , K (0°C to 999°C), PT-100 (0°C to 400°C)
OUTPUT	1 Relay 1C/O 5A, 230V AC (Resistive Load) or SSR Drive O/P 12V DC, 20mA (Parallel to Relay) (1 Set Point)		
Control Action	PID / ON-OFF (Configurable)		
Accuracy	±1% of Full Scale ±1 Digit		
Supply	100 to 270V AC (SMPS), 50/60Hz		

Temperature Controllers

PID Temperature Controller Modules



Master Module

Slave Module

Model		PTC-1X (Master Module) / PTC-2X (Slave Module)	UTC-1X (Master Module) / UTC-2X (Slave Module)
Dimension (HxWxD)mm		76 x 28 x 105	76 x 28 x 105
Panel Cutout (mm)		Din Rail Mounting	Din Rail Mounting
INPUT	Input	J / J.1 / K / K.1 / R / S / E / N / T / B / C / L / U / PT-100 / PT.1 0-10V DC/1-5V DC/0-20mA DC/4-20mA DC (Configurable)	J / K/PT-100 (Configurable)
	Range	J (0°C - 800°C), J.1 (0.0°C - 800.0°C), K (0°C - 1200°C), K.1 (0.0°C - 950.0°C), R (0°C - 1800°C)S (0°C - 1850°C), E (0°C - 650°C), N (0°C - 1350°C), T (0°C - 400°C), B (150°C - 1800°C), C (0°C - 2350°C) L (0°C - 800°C), U (0°C - 800°C), PT-100 (-100°C - 400°C), PT.1 (-100.0°C - 400.0°C), (-1999 to 9999 Analog I/P)	J (0°C to 600°C), K (0°C to 1200°C), PT-100 (-99°C to 400°C, -99.0°C to 400.0°C)
OUTPUT		2 Output : Relay 5A, 230V AC (Resistive Load) or SSR 24V DC, 20mA 4-20mA DC / 0-10V DC Output Available in PTC-1XA/2XA (Upcoming Model)	
Control Action		PID / TP / ON-OFF (Configurable)	
Accuracy		±0.5% of Full Scale	
Supply		24V DC (For Master Module)	

Features

MODBUS RS-485 Communication for HMI Indication
Connection Upto 1 Master + 7 Slave Modules

Model Selection Guide

Sr. No.	Model	Module	Input	Output 1	Output 2
1	TC-1X	Master	J, K Selectable	Relay Parallel SSR	-
2	TC-2X	Slave			
3	UTC-1X	Master	J, K, PT-100 Selectable	Relay	Relay
4	UTC-2X	Slave		Relay	Relay
5	UTC-1S	Master		SSR	Relay
6	UTC-2S	Slave		SSR	Relay
7	UTC-1SS	Master		SSR	SSR
8	UTC-2SS	Slave		SSR	SSR
9	PTC-1X	Master	J / J.1 / K / K.1 / R / S / E / N / T / B / C / L / U / PT-100 / PT.1 0-10V DC/1-5V DC/ 0-20mA DC/4-20mA DC (Configurable)	Relay	Relay
10	PTC-2X	Slave		Relay	Relay
11	PTC-1XA	Master		Analog O/P	Relay
12	PTC-2XA	Slave		Analog O/P	Relay
13	PTC-1XAS	Master		Analog O/P	SSR
14	PTC-2XAS	Slave		Analog O/P	SSR



cryo

A brand by **MULTISPAN**

Cooling Controller



Model	CC-510	CC-524
Dimension (HxWxD)mm	37 x 78 x 70	37 x 78 x 70
Panel Cutout (mm)	30 x 71	30 x 71
INPUT	Input	NTC (Thermistor)
	Range	-50.0°C to 99.9°C
OUTPUT	1 Relay 1C/O, 10A@230V AC (Resistive Load) (With Defrost Facility)	
Control Action	ON - OFF	
Supply	230V AC ±20%, 50Hz / 24V DC / 12V DC (Factory Set)	



Model	CC-548	CC-521
Dimension (HxWxD)mm	37 x 78 x 70	37 x 78 x 70
Panel Cutout (mm)	30 x 71	30 x 71
INPUT	Input	NTC (Thermistor) & Door Input
	Range	-50.0°C to 99.9°C
OUTPUT	2 Relay, 1 st Relay (NO-C) 20A for Compressor 2 nd Relay (NO-C-NC) 5A for Alarm	
Control Action	ON - OFF (Cooling Mode)	
Supply	230V AC ±20%, 50Hz / 24V DC / 12V DC (Factory Set)	



Model		MHC-512
Dimension (HxWxD)mm		37 x 78 x 70
Panel Cutout (mm)		30 x 71
INPUT	Input	Humidity Sensor
	Range	0.0 to 100.0% RH
OUTPUT		2Relay 1C/O, 10A @230V AC (Resistive Load)
Control Action		ON - OFF
Accuracy		±1% of Full Scale
Supply		230V AC ±20%, 50Hz / 24V DC / 12V DC (Factory Set)

Cryo Model Selection Guide

Sr. No.	Model	Size (HxWxD)mm	Input	Output 1	Output 2
1	CC-510	37 x 78 x 70	NTC (Thermistor)	Relay 10A (1C/O)	-
2	CC-520	37 x 78 x 78	NTC (Thermistor)	Relay 20A (1C/O)	-
3	CC-512	37 x 78 x 70	NTC (Thermistor)	Relay for Compressor 1C/O 10A	Relay for Alarm 1C/O 10A
4	CC-515	37 x 78 x 70	NTC (Thermistor)	Relay for Compressor 1C/O 10A	Buzzer (12V DC)
5	CC-552	37 x 78 x 70	NTC (Thermistor)	Relay for Compressor 1C/O 10A	Relay for Compressor 1C/O 10A
6	CC-521	37 x 78 x 70	NTC (Thermistor)	Relay for Compressor 1C/O 10A	Relay for Heater 1C/O 10A
7	CC-522	37 x 78 x 70	NTC (Thermistor)	Relay for Compressor (NO-C) 20A	Relay for Alarm 1C/O 5A
8	CC-525	37 x 78 x 70	NTC (Thermistor)	Relay for Compressor (NO-C) 20A	Buzzer (12V DC)
9	CC-548	37 x 78 x 70	NTC (Thermistor) + Door Input	Relay for Compressor (NO-C) 20A	Relay for Alarm 1C/O 5A
10	CC-524	37 x 78 x 70	2 NTC (Thermistor) + Digital Input	3 Relay 10A (Compressor + Fan + Defrost)	



Touch
Key
AVAILABLE

Programmable Timers

UP to 12 Channel Sequential Timer

With Cascading Facility For 8 + 8 Outputs

4,8 and 12 Channel
Sequential Timer



Model		SQT-1044 / SQT-1244 / SQT-1022	CMT-1022 / CMT-1044
Dimension (HxWxD)mm		96 x 96 x 54	96 x 96 x 54
Panel Cutout (mm)		92 x 92	92 x 92
INPUT	Range	99.99 Sec / 999.9 Sec / 99.59 Min / 99.59 Hrs / 999.9 Hrs / 999.9 Min (Configurable)	
OUTPUT		4 Relay / 8 Relay / 12 Relay 1C/O 5A,230V AC (Resistive Load) or SSR Drive O/P 24V DC, 20mA Output (Any One Factory Set)	
	Operating Mode	Delayed ON / Delayed OFF / Cycle Mode (Configurable)	
	Count Direction	UP / Down (Configurable)	
	Memory	YES / NO (Configurable)	
	Reset	Front & Back Both Reset Available	
	Supply	100 - 270V AC (SMPS), 50/60Hz	
	Note	Cascading facility available in SQT-1044 (8 Relay) Sequential timer up to 1 + 3 parallel SSR output is available on request Cascading facility available on request in SQT-1022	

Time Switch



Model	TCS-35
Dimension (HxWxD)mm	90 x 35 x 62
Panel Cutout (mm)	DIN Rail Mount
Time Format	12 Hr (AM / PM) and 24 Hr Selection
Output	1 Relay 1C/O 16A, 230V AC (Resistive Load)
Program	ON Time / OFF Time (50 Steps), 24 Days Holiday Setting
Supply	230V AC $\pm$ 10%, 50Hz

Programmable Timers

Universal Range - 1 Relay Output



Model	UTR-1033	UTR-2033	UTR-433	UTR-413
Dimension (HxWxD)mm	96 x 96 x 43	72 x 72 x 45	48 x 48 x 70	48 x 48 x 70
Panel Cutout (mm)	92 x 92	68 x 68	45 x 45	45 x 45
INPUT				
Start Pulse	Micro Switch / Limit Switch / Proximity (Configurable)			
Range	999 / 99.9 / 9.99 Sec / Min / Hrs (Configurable)			
OUTPUT	1 Relay 2C/O 5A,230V AC (Resistive Load)			
Program	Delayed ON / Delayed OFF / Cycle Mode (Configurable)			
Count Direction	UP / Down (Configurable)			
Memory	YES / NO (Configurable)			
Reset	Front & Back Both Reset Available			
Supply	100 - 270V AC (SMPS), 50/60Hz			

Programmable Timer

Universal Timer - 2 Relay Output



Model	UTR-1244	UTR-2244	UTR-4244	CTU-4244 (Universal Timer + Counter)
Dimension (HxWxD)mm	96 x 96 x 54	72 x 72 x 45	48 x 48 x 70	48 x 48 x 70
Panel Cutout (mm)	92 x 92	68 x 68	45 x 45	45 x 45
INPUT				
Start Pulse	Micro Switch / Limit Switch / Proximity (Configurable)			
Range	9999 / 999.9 / 99.99 Sec / Min / Hrs (Configurable)			
OUTPUT	2 Relay 1C/O 5A,230V AC (Resistive Load)			
Program	Forward - Reverse Mode, Cyclic Mode, Sequential Mode, Combination Mode (Configurable)			Timer: ON Delay, Interval, Cyclic On first, Batch Counter: ON Delay, Interval, Cyclic On first, Batch Batch Available in 2nd Relay
Count Direction	UP / Down (Configurable)			
Memory	YES / NO (Configurable)			
Reset	Front & Back Terminal Reset Available			
Supply	100 - 270V AC (SMPS), 50/60Hz			

Programmable Timers

Time Totalizer



Model	DTT-1000	DTT-2000	DTT-3000	DTT-56G	DTT-5000
Dimension (HxWxD)mm	96 x 96 x 43	72 x 72 x 36	48 x 96 x 29	38 x 62 x 63	36 x 77 x 69
Panel Cutout (mm)	92 x 92	68 x 68	46 x 92	31 x 54	30 x 71
INPUT	Micro Switch / Limit Switch / Proximity Switch / 230V AC (Factory Set)				
	Range 1) 9999.59 hr/min. 2) 9999.59 min/sec. 3) 99999.9 sec. 4) 999999 sec. 5) 9999.99 sec. 6) 99999.9 min. 7) 999999 min. 99999.9 hr. 9) 999999 hr (Configurable)				
Supply	230V AC ±20%, 50Hz				

Digital Presetable Timer

Multi Range - Thumbwheel Setting



Model	MDT-1310F	MDT-2312F	MDT-4310N	UTR-35
Dimension (HxWxD)mm	96 x 96 x 54	72 x 72 x 45	48 x 48 x 70	90 x 35 x 61.5
Panel Cutout (mm)	92 x 92	68 x 68	45 x 45	Din Rail Mounting
INPUT	Start Pulse Micro Switch			
	Range 999, 99.9, 9.99 Hour / Min / Sec (Configurable)			
OUTPUT	1 Relay 2C/O 5A, 230V AC (Resistive Load)		1 Relay 1C/O 5A, 230V AC (Resistive Load)	1 Relay 2C/O 5A, 230V AC (Resistive Load)
Operating Mode	Delayed ON / Delayed OFF (Configurable)			Delayed ON / Delayed OFF / Cycle Mode (Configurable)
Counting Direction	UP / Down (Configurable)			
Memory	YES / NO (Configurable)			
Supply	230V AC ±20%, 50Hz	100 - 270V AC (SMPS), 50/60Hz		

Programmable Counters

Photo Electric Controllers

For Fully Pneumatic Packaging Machine

		Model	PFLC-68
		Dimension (HxWxD)mm	96 x 96 x 54
		Panel Cutout (mm)	92 x 92
INPUT	Input 1	Start Pulse	
	Input 2	Color Mark Sensor (NPN/PNP Selection)	
	Input 3	Unwinding Start	
	Input 4	Unwinding Stop	
OUTPUT	Output 1	Horizontal seal	
	Output 2	Vertical seal	
	Output 3	Cutter	
	Output 4	Nitrogen Fill	
	Output 5	Batch Cutter	
	Output 6	Batch Coding	
	Output 7	Auger	
	Output 8	Unwinding	
		Memory	Non - Volatile Memory
		Reset	Manual Reset
		Supply	24V DC



**Touch
Screen**




		Model	MPC-1065
		Dimension (HxWxD)mm	96 x 96 x 54
		Panel Cutout (mm)	92 x 92
INPUT	Input 1	2 NPN/PNP Proximity Switch (Factory Set)	
	Input 2	Color Mark Sensor (NPN/PNP Selection)	
OUTPUT	Output 1	Horizontal seal	
	Output 2	Nitrogen Fill	
	Output 3	Batch Cutter	
	Output 4	Unwinding	
		Memory	Non - Volatile Memory
		Reset	Manual Reset
		Supply	24V DC

Programmable Timers

Color Mark Sensor

For Packaging Machine
& Printing Industries

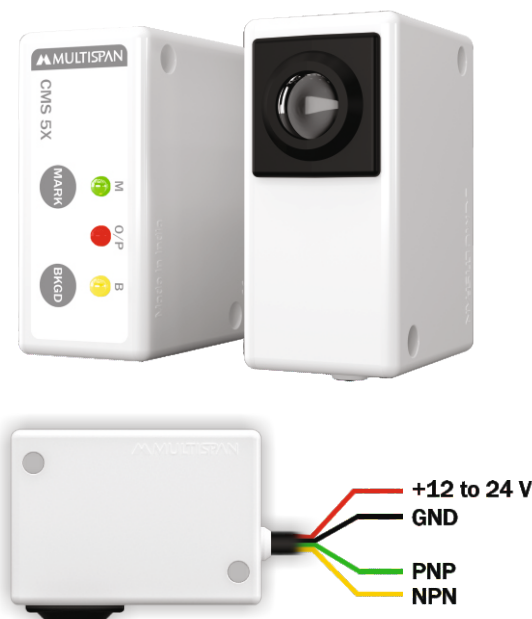

Model	CMS-5X
Power Supply	12 - 24V DC
Current Consumption	35mA max.@ 24V DC
Output	NPN / PNP Output
Output Current	25mA max
Response Time	2 Millisecond
Indications	LED 1 : Mark LED (Green) LED 2 : Output LED (Red) LED 3 : Background LED (Yellow)
Push Buttons	Button 1 : Mark Button Button 2 : Background Button
Minimum Mark Output Relay	20ms
Operating Distance	10mm - 15mm
Minimum Spot Diameter	5mm
Emission type	RED (630nm) GREEN (520nm) BLUE (465nm)
Ambient Light Rejection	Yes
Connection	Shielded 4 Wire Cable

Programmable Counters

Photo Electric Controllers



Model	MPC-1061D	MVC-72N	MVC-7210
Dimension (HxWxD)mm	96 x 96 x 54	72 x 72 x 45	72 x 72 x 97
Panel Cutout (mm)	92 x 92	68 x 68	68 x 68
DISPLAY	Graphical LCD		
INPUT	Input 1 : 1 or 2 NPN Proximity Switch (Factory Set) Input 2 : Color Mark Sensor	NPN / PNP Proximity Switch	NPN / PNP Proximity Switch
OUTPUT	2 Output (Forward & Reverse Winding), 2A, 110V AC / 230V AC + Buzzer Output	0 - 110V AC Corresponding to percentage input	0 - 110V AC Corresponding to percentage input
Memory	Non - Volatile Memory		
Reset	Manual Reset		
Supply	For MPC 1061D 110V AC, $\pm 20\%$, 50Hz For MPC 1062D 230V AC, $\pm 20\%$, 50Hz	230V AC $\pm 20\%$, 50Hz	230V AC $\pm 20\%$, 50Hz
Note		Vibrator load should not be more than 5Amps (Resistive Load) Range : 1 to 99%	Vibrator load should not be more than 10Amps (Resistive Load) Range : 1 to 99%

Programmable Counters

Digital Batch Counter



Model	BC-1046D	BC-2046	BC-445	
Dimension (HxWxD)mm	96 x 96 x 43	72 x 72 x 45	48 x 48 x 70	
Panel Cutout (mm)	92 x 92	68 x 68	45 x 45	
INPUT	Input	NPN/PNP Proximity Switch / Micro Switch (Configurable) or 230V AC Pulse (Factory Set)		
	Range	Upper Display Range : 0-999999 Count Lower Display Range : 0-9999		
OUTPUT	1 Relay + Buzzer			
		Non - Volatile Memory		
	Reset	Auto Reset / Manual Reset / Back Reset		
	Supply	230V AC ±20%, 50Hz	100 - 270V AC (SMPS), 50/60Hz	
	Note	RS-485 Modbus Communication is available as per request in 96 x 96 Size		

Digital Length Counter

With Proximity / Single & Dual Channel Encoder Input



Model	LC-3086	LC-1046D	LC-2046	LC-445
Dimension (HxWxD)mm	48 x 96 x 85	96 x 96 x 43	72 x 72 x 45	48 x 48 x 70
Panel Cutout (mm)	46 x 92	92 x 92	68 x 68	45 x 45
INPUT	Input	NPN/PNP Proximity Switch (Configurable) or Encoder (Factory Set)		
	Range	00000.000 to 99999999	0-99999.9 / 0-999999 / 0-9999.99 / 0-999.999 Meter (Configurable)	
OUTPUT	1 Relay 1C/O, 5A @230V AC (Resistive Load)			
MPM Range	999.999 MPM (DP Auto Shift)	999.9 MPM (DP Auto Shift)		
Diameter	0-9999.99 MM			
Memory	Non - Volatile Memory			
Reset	Auto Reset / Manual reset facility & front and back reset			
Supply	100 - 270V AC (SMPS),	230V AC, ±20% 50Hz	100 - 270V AC (SMPS), 50/60Hz	
Note	In LC-445 if back reset option is required, then input would be proximity sensor (NPN or PNP) (Factory Set) RS-485 Modbus Communication is available as per request in 96x96 Size (LC-1048-M1), 72x72 Size (LC-2046-M1) 2 Relay Output available as per request in 72x72 size (MMC-2046) , 96x96 size MMC-1000			

Programmable Counters

Digital Programmable Counter



Model		PC-1044	PC-2044	PC-444
Dimension (HxWxD)mm		96 x 96 x 54	72 x 72 x 45	48 x 48 x 70
Panel Cutout (mm)		92 x 92	68 x 68	45 x 45
INPUT	Input	NPN/PNP Proximity Switch / Micro Switch (Configurable) or 230V AC Pulse or Encoder (Factory Set)		
	Range	0 - 9999 Count		
OUTPUT		1 Relay 1C/O 5A,230V AC (Resistive Load)		
Count Direction		UP / Down (Configurable)		
Memory		YES / NO (Configurable)		
Reset		Auto Reset / Manual Reset / Reset at back		
Supply		230V AC ±20%,50Hz	100 - 270V AC (SMPS), 50/60Hz	
Note		Dual Set Point , Scale factor & 2 Relay Option Available on customer request in PC-1044,2044		

Digital Presetable Counter

With Thumbwheel Setting



Model		TWS-1400F	TWS-2500F
Dimension (HxWxD)mm		96 x 96 x 54	72 x 72 x 45
Panel Cutout (mm)		92 x 92	68 x 68
INPUT	Input	NPN/PNP Proximity Switch / Micro Switch (Configurable) or 230V AC Pulse or Encoder (Factory Set)	
	Range	0 to 9999	
OUTPUT		1 Relay 2C/O 5A,230V AC (Resistive Load)	
Operating Mode		Delayed ON / Delayed OFF (Configurable)	
Count Direction		UP / Down (Configurable)	
Memory		YES / NO (Configurable)	
Speed Selection		Medium (UP to 5000 rpm) , Fast (UP to 15000 rpm) (Configurable)	
Supply		100 - 270V AC (SMPS), 50/60Hz	

Programmable Counters

Digital RPM Indicator



Model		RPM-1201	RPM-2201	RPM-3201	RPM-4201
Dimension (HxWxD)mm		96 x 96 x 43	72 x 72 x 36	48 x 96 x 29	48 x 48 x 70
Panel Cutout (mm)		92 x 92	68 x 68	46 x 92	45 x 45
INPUT	Input	NPN/PNP Proximity Switch (Configurable)			
	Range	4 - 5000 RPM			
	Supply	230V AC ±20%, 50Hz	100 - 270V AC (SMPS), 50/60Hz		
	Note	RS-485 Modbus Communication is available as per request in 48 x 96 Size (RPM 308-M1)			

Digital Count Totalizer



Model		CT-1000	CT-2000	CT-3000	CT-5000	CT-56G
Dimension (HxWxD)mm		96 x 96 x 43	72 x 72 x 36	48 x 96 x 29	36 x 77 x 69	38 x 62 x 63
Panel Cutout (mm)		92 x 92	68 x 68	46 x 92	30 x 71	31 x 54
INPUT	Input	NPN/PNP Proximity Switch / Micro Switch (Configurable) or 230V AC Pulse or Encoder (Any one factory set)				
	Range	0 to 999999 Count				
	Memory	Non - Volatile Memory				
	Reset	Manual reset, Back reset (Optional)				
Supply		230V AC $\pm 20\%$, 50Hz	100 - 270V AC (SMPS), 50/60Hz			230V AC $\pm 20\%$, 50Hz

Programmable Counters

Speed / Ratio Indicator



Model		RPM-1044	RPM-2044
Dimension (HxWxD)mm		96 x 96 x 54	72 x 72 x 45
Panel Cutout (mm)		92 x 92	68 x 68
INPUT	Input	NPN/PNP Proximity Switch (Configurable), Proximity Input (Stretch Ratio Indicator)	
	Range	0 to 9999 RPM	
OUTPUT		1 Relay on RPM (Retransmission Output 4-20mA DC / 0-10V DC - 96x96 Size) (Factory Set) (Optional)	
Accuracy		±1% of Full Scale	
Supply		100 - 270V AC (SMPS), 50/60Hz	

Programmable Timer

Counter + RPM



Model		MMC-1046RD	MMC-2046R
Dimension (HxWxD)mm		96 x 96 x 43	72 x 72 x 45
Panel Cutout (mm)		92 x 92	68 x 68
INPUT	Input	NPN/PNP Proximity Switch / Micro Switch (Configurable) / 230V AC Pulse (Factory Set)	
	Range	Upper Display Range : 0 - 999999 Count, Lower Display Range : 0 - 9999 RPM	
OUTPUT		1 Relay 1C/O 5A,230V AC (Resistive Load)	
Memory		Non - Volatile Memory	
Reset		Auto Reset / Manual Reset / Back Reset	
Supply		230V AC ±20%, 50Hz	100 - 270V AC (SMPS), 50/60Hz

Protection Relays

Automatic Power Factor Controller

Intelligent PF Correction Relay



6 / 8 / 12 / 14 / 16 Steps

Model	APFC 9608	APFC 108	APFC 112
Dimension (HxWxD)mm	96 x 96 x 54	144 x 144 x 80	144 x 144 x 80
Panel Cutout mm	92 x 92	138 x 138	138 x 138
INPUT			
Current	10mA to 5Amp AC (Without CT) (CT Ratio Selectable 5/5A to 9995/5A) For Main CT & Capacitor CT	10mA to 5Amp AC (Without CT) (CT Ratio Selectable 5/5A AC to 9999/5A) For Main CT & Capacitor CT	
Controlling PF Range	+1.000 (Lag) To -1.000 (Lead)	+1.000 (Lag) To -1.000 (Lead)	
Min. Operation Current	Selectable Range 1mA to 500mA (By Default 30mA)	Selectable Range 1mA to 500mA (By Default 30mA)	
Input Volatge	30 to 320V AC (P-N) CAT III	300 to 520V AC (P-P) CAT III	
SENSING	Single CT Based Sensing True RMS, Scan Time 1Sec. to 999.9 Sec.	Scan Time 1 Sec. to 999.9 Sec.	
OUTPUT	NO-C 8 Relay for Capacitor Bank + 1 Alarm	NO-C 8 Relay for capacitor bank + 1 Alarm or 1 Fan Relay	NO-C 12 Relay for capacitor bank + 1 Alarm Relay 1 Fan Relay
USER PROGRAMM. FUNCTIONS	Set PF, Relay Switch ON Time, Control Modes, Mains Primary CT Ratio, Relay Steps to be used, Capacitor Primary CT Ratio (To be used if actual capacitor value is to be measured at any given time)	Main CT Ratio, Capacitor CT Ratio, Minimum Operating Current, Scan Time, Programmable KVAR Hysteresis, Capacitor bank sensing method	
Control Mode	KVAR/ Intel/ Manual	KVAR/ Intel/ Manual	
Accuracy	Class 0.5	Class 0.5	
Supply	100 to 270V AC	300 to 520V AC (P-P) CAT III	

Protection Relays

Earth Leakage Relay



	Model	ELR-19N	ELR-63	EFR-63 - Earth Fault Relay
	Dimension (HxWxD)mm	96 x 96 x 54	76 x 28 x 85	76 x 28 x 85
	Panel Cutout mm	92 x 92	Din Rail Mounting	Din Rail Mounting
INPUT	Input Signal	30mA to 30.0Amp AC Thru. External CBCT		Current : 5Amp From CBCT
	Range	30mA to 30A AC	30mA to 30.0A AC	10% to 100% of CT rating
OUTPUT		2 Relay (NO-C-NC) 5A, 230V AC Resistive Load	1 Relay (NO-C) 5A, 230V AC Resistive Load	1 Relay (5A, 230V AC Resistive Load) Earth Fault Current
	Accuracy	Class 0.5		
	Supply	100 to 270V AC/DC (SMPS), 50/60Hz		
	Note	RS-485 Modbus is available in ELR-19N as per request, CBCT available as per required inner diameter		




	Model	ECT 35 / ECT 70D	ELR-35	ER-2K
	Dimension (HxWxD)mm	76 x 40 x 105 / 115 x 42 x 141	90 x 35 x 61.5	90 X 35 X 62.5
	Panel Cutout mm	Din Rail Mounting	Din Rail Mounting	Din Rail Mounting
INPUT	Range	30mA to 3A AC	30mA to 30A AC	30mA to 30A AC
	OUTPUT	1 Relay (NO-C-NC) 5A, 230V AC Resistive Load	2 Relay, 1 st Relay (NO-C-NC) & 2 nd Relay (NO-C) 5A,230V (Resistive Load)	1 Relay (NO-C-NC) 5A, 230V AC Resistive Load
	Reset & Test	Front Test & Reset Facility		
	Accuracy	Class 0.5		
	Supply	100 to 270V AC/DC (SMPS), 50/60Hz		

Protection Relays

Protection Device - 3 Phase



DINRAIL
MOUNT



Model		MPD-192			MPD-152	
Dimension (HxWxD)mm		96 x 96 x 54			75 x 55 x 110	
Panel Cutout mm		92 x 92			Din Rail Mounting	
INPUT	Signal	3Ø4 Wire / 3Ø3 Wire				
	Voltage	50 - 520V AC (L-L), 30 - 300V AC (L-N)				
	Current	100mA to 5A (CT Selection 5A - 6000A AC) (Additional Leakage Current Measurement thru CBCT in MPD-19EL)				
OUTPUT	1st Relay (NO-C-NC) 10A, 230V AC (Resistive Load) 2nd Relay (NO-C) 5A (With Simultaneous Actuation)			1 Relay (NO-C-NC) 10A, 230V AC (Resistive Load)		
PARAMETER	Over Current	Under Current	Short Circuit	Lock Rotor Point	Earth Leakage (in MPD-19EL)	
	Over Voltage	Under Voltage	Phase Sequence	Unbalance	Single Phase Preventor (SPP)	
	Over Frequency	Under Frequency	Phase Loss	Neutral Loss		
Accuracy	Class 0.5					
Supply	100 to 270V AC/DC (SMPS), 50/60Hz					
Note	Optional Features Available on request RS 485 Modbus Earth Leakage in model MPD 19EL Earth Fault in model MPD 19EF External CT of 30A, 60A, 100A, 125A & 250A CBCT Available as per required Inner Diameter					

Current Controller



Model	CC-12		
Dimension (HxWxD)mm	96 x 96 x 43		
Panel Cutout mm	92 x 92		
INPUT	Current	5A AC Direct (CT Ratio Selectable 5/5A to 4000/5A)	
OUTPUT	1 Relay (NO-C-NC) 5A, 230V AC (Resistive Load)		
Tripping Facility	High/ Low/ Inband/ Outband/ Absolute Low/ Absolute Outband Alarm (Configurable)		
Accuracy	Class 0.5		
Power Supply	100 to 270V AC/DC (SMPS), 50/60Hz		
Note	RS-485 Modbus is available on request 2 Relay is available on request in CC-122		

Earth To Neutral Voltage



Model	EN-19N		
Dimension (HxWxD)mm	96 x 96 x 54		
Panel Cutout mm	92 x 92		
INPUT	Voltage	0 to 10 Voltage AC	
OUTPUT	1 Relay (NO-C-NC) 5A, 230V AC (Resistive Load)		
	Parameter	Earth to Neutral Voltage Protection Relay	
	Power Supply	100 to 270V AC (SMPS), 50/60Hz	
	Note	RS-485 Modbus available on request	

Protection Relays

Voltage Protection Relay



Model	VMR-132			VMR-232
Dimension (HxWxD)mm	96 x 96 x 43			72 x 72 x 45
Panel Cutout mm	92 x 92			68 x 68
INPUT	Voltage	50 to 520V AC (L-L), 30 to 300V AC (L-N)		
OUTPUT		1st Relay 5A, 230V AC (Resistive Load) 2nd Relay (Optional)		
PARAMETER		Over Voltage Under Voltage	Over Frequency Under Frequency	Phase Loss Phase Sequence Asymmetry Neutral Loss
Supply		230V AC ±20%, 50Hz		50 to 550V AC,50/60Hz

DINRAIL
MOUNT



Model	VPR-35	VPR-33	VR-3K	VR-3KN
Dimension (HxWxD)mm	90 x 35 x 61.5	90 x 35 x 61.5	90 x 35 x 62.5	90 x 35 x 62.5
Mounting	Din Rail Mounting			
INPUT	Signal	3Ø4 Wire / 3Ø3 Wire / 1Ø2 Wire	3Ø3 Wire	3Ø4 Wire
	Voltage	50 to 330V AC (L-N), 85 to 550V AC (L-L)	160 to 300V AC (L-N), 260 to 520V AC (L-L)	280 to 520V AC (L-L)
OUTPUT		2 Relay (NO-C-NC) 230V AC (Resistive Load)		1 Relay 2C/O 5A, 230V AC (Resistive Load)
PARAMETER		Over Voltage Under Voltage Over Frequency Under Frequency Phase Loss Phase Sequence Asymmetry & Neutral Loss	Over Voltage Under Voltage Phase Asymmetry Phase Loss Phase Sequence	Over Voltage Under Voltage Phase Asymmetry Phase Loss Phase Sequence Neutral Loss
Accuracy	Class 1.0	Class 1.0		
Supply	100 to 270V AC/DC (SMPS)	No Power Supply to be given Separately		



DINRAIL
MOUNT



Model	CPR-35	CPR-35-1C	CR-3K	CPR-22 - 1CT	
Dimension (HxWxD)mm	90 x 35 x 61.5	90 x 35 x 61.5	90 x 35 x 62.5	90 x 22.5 x 72	
Mounting	Din Rail Mounting				
INPUT	Signal	3Ø3 Wire	1Ø2 Wire	3Ø3 Wire	1Ø2 Wire
	Current	0.05 to 5Amp (CT Selection 5/5 To 999/5 A AC)		0.2 to 5A AC	0.3 to 5A AC
OUTPUT	1 Relay (NO-C-NC)		1 Relay 2C/O 5A, 230V AC (Resistive Load)	1 Relay 1C/O 5A, 230V AC (Resistive Load)	
PARAMETER	Over Current Under Current Asymmetry Single Phase Preventer (SPP)	Over Current Under Current	Over Current Under Current Single Phase Preventor (SPP)	Over Current Under Current	
Accuracy	Class 1.0				Class 1.0
Supply	100 - 270V AC/DC (SMPS), 50/60Hz				230V AC ±20%,50Hz



10-30A

10-60A

50-100A

30-60A

30-60A

Model	OLR 50100	
Dimension (HxWxD)mm	70 x 70.5 x 91	
Mounting	Din Rail Mounting	
INPUT	Input Current : 50A to 100A AC	
OUTPUT	1 Relay 1C/O, 5A 230V AC (Resistive Load)	
TRIPPING PARAMETER	Over Current	SPP
POWER SUPPLY	230V AC,50Hz	

Demand Controller

Power , Energy & Demand



Model	DMR 162		
Dimension (HxWxD)mm	96 x 96 x 61.5		
Panel Cutout mm	92 x 92		
INPUT	Signal	3Ø4 Wire / 3Ø3 Wire / 1Ø2 Wire	
	Voltage	Primary : 100V to 520kv (Programmable), Secondary : 100V to 520V (L-L) (Programmable)	
	Current	Current : 5A to 9999A (Programmable), Secondary : 5A/1A (Programmable)	
OUTPUT	2 Relay (NO-C), 7A, 250V AC (Resistive Load)		
PARAMETER	Voltage - L-L, L-N & Average THD% - Current and Voltage WH - Import , Export & VAH	Current - Phase, Average & Neutral Current Power - KW, KVA, KVAr (per phase and total) VArh - Import, Export	Power Factor - Per Phase & Average Max Demand - KW, KVA, KVAr, Ampere Load Hour, No Load Hour, RPM
COMMUNICATION	RS-485 Modbus (Optional)		
Accuracy	Class 0.5		
Supply	100 to 300V AC, 130 to 300DC (SMPS) 50/60Hz, Approx 4VA		


DC Voltage Protection Relay

Model		VDC 35
Dimension (HxWxD)mm		90 x 35 x 61.5
Mounting		Din Rail Mounting
INPUT	Voltage	18 to 70V DC, 70 to 300V DC (Factory Set)
OUTPUT		2 Relay (NO-C-NC) 230V AC (Resistive Load)
PARAMETER		Over Voltage Under Voltage
Accuracy		±1% of Full Range ±1 Count
Supply		No Power Supply to be given Separately



Din Rail Protection Relays

Voltage Protection Relay

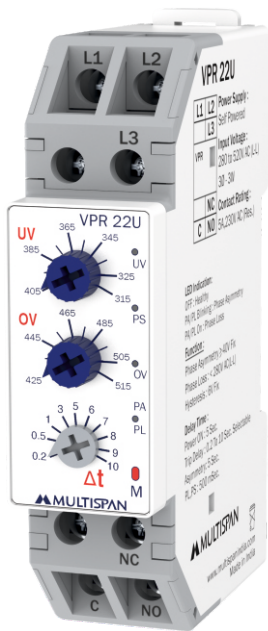

Model	VPR-22U
Dimension (HxWxD)mm	90 x 22.5 x 63
Mounting	Din Rail Mounting
INPUT	Input Voltage : 280 to 520V AC (L-L), 3Ø3 Wire
OUTPUT	1 Relay, 5A, 230V AC (Resistive Load)
TRIPPING PARAMETER	Under Voltage Over Voltage Phase Asymmetry Phase Sequence Phase Loss
POWER SUPPLY	NO Power Supply to be given separately

Model	SPP-22 / V22-RYB
Dimension (HxWxD)mm	90 x 22.5 x 59.5 / 90 x 22.5 x 62.5
Mounting	Din Rail Mounting
INPUT	Input Voltage : 280 to 520V AC (L-L), 3Ø3 Wire
OUTPUT	1 Relay 5A, 230V AC (Resistive Load)
TRIPPING PARAMETER	Phase Asymmetry Phase Sequence Phase Loss
POWER SUPPLY	NO Power Supply to be given separately



Model	VPR-17U
Dimension (HxWxD)mm	90 x 17.5 x 61
Mounting	Din Rail Mounting
INPUT	Input Voltage : 180 to 528V AC (L-L), 3Ø3 Wire
OUTPUT	1 Relay, 5A, 230V AC (Resistive Load)
TRIPPING PARAMETER	Under Voltage Over Voltage Phase Asymmetry Phase Sequence Phase Loss
POWER SUPPLY	NO Power Supply to be given separately

Din Rail Analog Timers

22 Timer Series



Model		DT Series
Dimension (HxWxD)mm		90 x 22.5 x 63
Mounting		Din Rail Mounting
INPUT	Range	0 to 10 Sec (For DT-10S) 0 to 30 Sec (For DT-30S) 0 to 60 Sec (For DT-60S) 0 to 15 Min (For DT-15M) 0 to 30 Min (For DT-30M)
OUTPUT	1 Relay 1C/O, 5A 230V AC (Resistive Load)	
POWER SUPPLY	230V AC $\pm$ 20%, 50Hz / 415V AC (Factory Set)	


Model		DI-22U
Dimension (HxWxD)mm		90 x 22.5 x 72
Mounting		Din Rail Mounting
INPUT	Range	0.1 Sec to 10 Sec / Min / Hour
OUTPUT	1 Relay 2C/O 5A, 230V AC (Resistive Load)	
POWER SUPPLY	12V to 240V DC & 20V to 240V AC, 50/60Hz	



Model		DI-22
Dimension (HxWxD)mm		90 x 22.5 x 72
Mounting		Din Rail Mounting
INPUT	Range	0.1 Sec to 10 Sec / Min / Hour
OUTPUT	1 Relay 1C/O 5A, 230V AC (Resistive Load)	
POWER SUPPLY	230V AC $\pm$ 20%, 50Hz & 24V AC/DC	

Din Rail Analog Timers

22 Timer Series

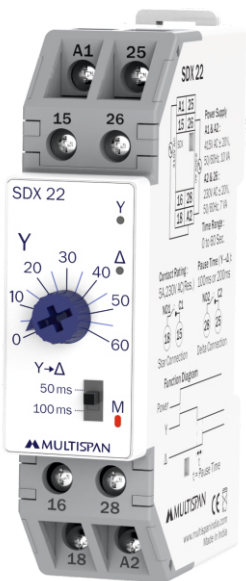


Model	SDX-22
Dimension (HxWxD)mm	90 x 22.5 x 63
Mounting	Din Rail Mounting
INPUT	Range
OUTPUT	Range
POWER SUPPLY	Range

Star Delta Timer
90 x 22.5 x 63
Din Rail Mounting
Time Range : 0 to 60 Sec
Pause Time : 50ms or 100ms Selection by front key
2 Relay O/P (1C/O, 5A 230V AC (Resistive Load)
1st Relay for star connection &
2nd Relay for delta connection
230V AC $\pm 20\%$, 50Hz
415V AC $\pm 20\%$, 50Hz


Model	CYL-22U
Dimension (HxWxD)mm	90 x 22.5 x 72
Mounting	Din Rail Mounting
INPUT	Range
OUTPUT	Range
POWER SUPPLY	Range

Cycle Timer (Universal Supply)
90 x 22.5 x 72
Din Rail Mounting
0.1 Sec to 10 Sec / Min / Hour
1 Relay 2C/O 5A, 230V AC (Resistive Load)
12V to 240V DC & 20V to 240V AC, 50/60Hz

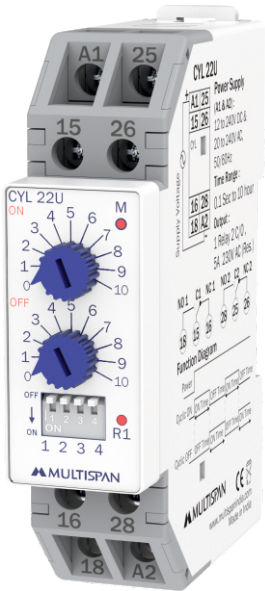


Model	FRT-22U
Dimension (HxWxD)mm	90 x 22.5 x 72
Mounting	Din Rail Mounting
INPUT	Range
OUTPUT	Range
POWER SUPPLY	Range

Forward Reverse Timer (Universal Supply)
90 x 22.5 x 72
Din Rail Mounting
Forward & Reverse Time Range : 0.1 Sec to 10 Hour
Pause Time : 1 Sec to 100 Sec
2 Relay 1 C/O, 5A 230V AC (Resistive Load)
1st Relay For Forward Time &
2nd Relay For Reverse Time
12V to 240V DC & 20V to 240V AC, 50/60Hz

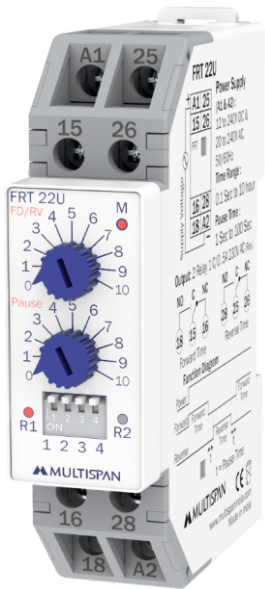


Din Rail Relays

22 Series

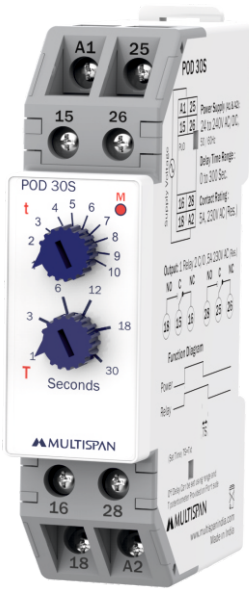

Model	POD-30S
Dimension (HxWxD)mm	Power OFF Delay Timer 90 x 22.5 x 63
Mounting	Din Rail Mounting
INPUT	1 to 360Sec
OUTPUT	1 Relay 2C/O 5A, 230V AC (Resistive Load)
POWER SUPPLY	24V to 240V AC/DC , 50/60Hz

Model	MDT-17U
Dimension (HxWxD)mm	Multifunction timer 90 x 17.5 x 62
Mounting	Din Rail Mounting
INPUT	Start Pulse Micro Switch
Range	0.1 Second to 3 Hour
OUTPUT	1 Relay 1C/O 5A, 230V AC (Resistive Load)
PROGRAM	10 Program
POWER SUPPLY	12V to 240V DC & 20V to 240V AC, 50/60Hz

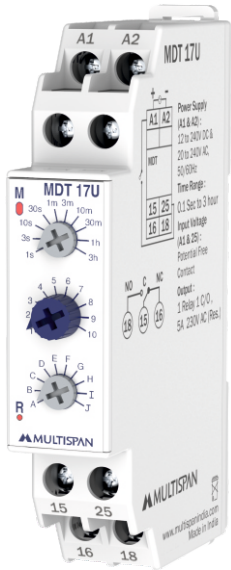

Multi Channel Current Transducer

CT upto 100A



DINRAIL
MOUNT

3CT

4CT

6CT

8CT

Model	MCS-63
Dimension (HxWxD)mm	76 x 28 x 116
Mounting	Din Rail Mounting
INPUT	Current : 2A to 60A Direct UP to 6 Current Scanner
OUTPUT	RS-485 Modbus
POWER SUPPLY	24V DC, 100 to 270V AC
Note	100 Amp 3 CT Also Available

Water Level Controller

WLC
2 TANK

WLC
1 TANK



Model	WLC 35
Dimension (HxWxD)mm	90 x 35 x 61.5
Mounting	Din Rail Mounting
INPUT	6 Nos Probes S-1 : Common, S-2 : Low, S-3 : High
OUTPUT	1 Relay 1C/O, 5A 230V AC (Resistive Load)
SENSITIVITY	1K to 1MΩ
TRIP DELAY	0 to 10 Second
POWER SUPPLY	100 to 270V AC, 50/60Hz

Logic Relay

Model	LR 35
Dimension (HxWxD)mm	90 x 35 x 59
Mounting	Din Rail Mounting
INPUT	2 Micro Switch
OUTPUT	2 Relay, 1C/O (NO-C-NC)
POWER SUPPLY	100 to 270V AC, 50/60Hz



Winding Temperature Relay



Model	WTR 35
Dimension (HxWxD)mm	90 x 35 x 59
Mounting	Din Rail Mounting
INPUT	PTC Probe
OUTPUT	1 Relay 2C/O, 5A 230V AC (Resistive Load)
RANGE	70°C to 180°C
RESET MODE	Auto / Manual Selectable
POWER SUPPLY	50 to 550V AC


Power & Energy Meters

Dual Source Meter



Model	DSM 14		DSM 11
Dimension (HxWxD)mm	96 x 96 x 54		96 x 96 x 54
Panel Cutout mm	92 x 92		92 x 92
INPUT	Signal	3Ø4 Wire / 3Ø3 Wire / 1Ø2 Wire + DG Input	
	Voltage	Primary : 100V to 520kv (Programmable), Secondary : 100V to 520V (L-L) (Programmable)	
	Current	Current : 5A to 9999A (Programmable), Secondary : 5A/1A (Programmable)	
PARAMETER	Voltage - L-L, L-N & Average Power Factor - Per Phase & Average Power - KW, KVA, KVAR (per phase and total)		Current - Phase, Average Energy - Kwh, KVAh, KVArh Power - KW, KVA, KVAR (per phase and total)
COMMUNICATION	RS-485 Modbus (Optional) & Pulse Output		
Accuracy	Class 0.5		
Supply	100 to 270V AC/DC (SMPS) , 50/60Hz, Approx 4VA		

DIN Rail AC Multifunction Meter

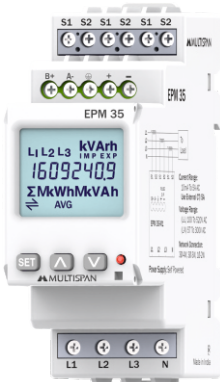

Model	EPM-35		EPM-70
Dimension (HxWxD)mm	90 x 35 x 72		90 x 70 x 62
Panel Cutout (mm)	Din Rail Mounting		Din Rail Mounting
INPUT	Signal	3Ø4 Wire / 3Ø3 Wire / 1Ø2 Wire	3Ø4 Wire / 3Ø3 Wire / 1Ø2 Wire
	Voltage	Primary : 100V to 520kv (Programmable), Secondary : 100V to 520V (L-L) (Programmable)	
	Current	Current : 5A to 9999A (Programmable), Secondary : 5A/1A (Programmable)	
PARAMETER	Ampere, Volt, Frequency, KW, KVA, KVAR, Kwh, KVArh (Import & Export), KVAh PF (Per Phase & Average)		Ampere, Volt, Frequency, KW, KVA, KVAR (Total & Per Phase), Kwh, KVArh (Import & Export), KVAh PF (Per Phase & Average), THD% (A,V)
Communication	RS-485 Modbus & Pulse Output		
Accuracy	Class 0.5		
Supply	Self Powered		100 - 300V AC/DC, 50/60Hz
Note	External CT must be connected in EPM-35		

Power & Energy Meters

Multifunction Meter with Harmonics



Model		PQM 16	PQM 14
Dimension (HxWxD)mm		96 x 96 x 46	96 x 96 x 46
Panel Cutout mm		92 x 92	92 x 92
INPUT	Signal	3Ø4 Wire / 3Ø3 Wire / 1Ø2 Wire	3Ø4 Wire / 1Ø2 Wire
	Voltage	Primary : 100V to 520kv (Programmable), Secondary : 100V to 520V (L-L) (Programmable)	
	Current	Current : 5A to 9999A (Programmable), Secondary : 5A/1A (Programmable)	
PARAMETER	KW Total	0.000 - 9999 MW	0.000 - 9999 MW
	KW Per Phase	0.000 - 9999 MW	0.000 - 9999 MW
	WH Total	0.000 - 999999999 MWH	000.000 - 999999999.999 KWH
	Power Factor Average (PF)	-1.000 to 1.000	-1.000 to 1.000
	Power Factor Per Phase (PF)	-1.000 to 1.000	-1.000 to 1.000
	KVA Total	0.000 - 9999 MVA	0.000 - 9999 MVA
	VAH Total	0.000 - 999999999 MVAH	000.000 - 999999999.999 KVAH
	Frequency (Hz)	45 - 60Hz	45 - 60Hz
	KVAr Total	0.000 - 9999 MVAr	0.000 - 9999 MVAr
	Varh Total	000.000 - 999999999 MVArh	000.000 - 999999999.999 KVArh
	Load Hours	9999.59 Hrs/Min.	9999.59 Hrs/Min.
	NO Load Hours	9999.59 Hrs/Min.	9999.59 Hrs/Min.
	RPM	3600 RPM @ 60Hz & 2 Pole	3600 RPM @ 60Hz & 2 Pole
COMMUNICATION		RS-485 Modbus (Optional) Pulse Output	
Accuracy		Class 0.5 / Class 0.2 (Optional) Available in Model PQM-16	
Supply		100 to 300V AC/DC , 50/60Hz, Approx 4VA	

Power & Energy Meters

Multifunction Meter

with Harmonics



Model		AVH-16	MFM-15
Dimension (HxWxD)mm		96 x 96 x 54	96 x 96 x 54
Panel Cutout mm		92 x 92	92 x 92
INPUT	Signal	3Ø4 Wire / 3Ø3 Wire / 1Ø2 Wire	
	Voltage	Primary : 100V to 520kv (Programmable), Secondary : 100V to 520V (L-L) (Programmable)	
	Current	Current : 5A to 6000A (Programmable), Secondary : 5A/1A (Programmable)	
PARAMETER	KW Total	0.000 - 9999 MW	0.000 - 9999 MW
	KW Per Phase	0.000 - 9999 MW	0.000 - 9999 MW
	WH Total	0.000 - 99999999 MWH (Import & Export)	000.000 - 999999999.999 KWH
	Power Factor Average (PF)	0.100 - 1.000	0.100 - 1.000
	Power Factor Per Phase (PF)	0.100 - 1.000	0.100 - 1.000
	KVA Total	0.000 - 9999 MVA	0.000 - 9999 MVA
	VAH Total	0.000 - 99999999 MVAh	000.000 - 999999999.999 KVAh
	Frequency (Hz)	45 - 60Hz	45 - 60Hz
	KVAr Total	0.000 - 9999 MVar	0.000 - 9999 MVar
	Varh Total	000.000 - 99999999 MVarh (Import & Export)	000.000 - 999999999.999 KVarh
	THD%	Up to 32 Order (Voltage & Ampere)	Up to 32 Order (Voltage & Ampere)
	Load Hours	9999.59 Hrs/Min.	9999.59 Hrs/Min.
	NO Load Hours	9999.59 Hrs/Min.	9999.59 Hrs/Min.
	RPM	3600 RPM @ 60Hz & 2 Pole	3600 RPM @ 60Hz & 2 Pole
COMMUNICATION		RS-485 Modbus (Optional) Pulse Output	
Accuracy		Class 0.5 / Class 0.2 (Optional) Available in Model AVH-16	
Supply		100 to 270V AC/DC (SMPS) , 50/60Hz	
Note		1 Relay (NO-C) 5A, 230V AC Resistive Load & Dual Terrif available in AVH-16 As per request	

Power & Energy Meters

Multifunction Meter



Model		AVH-14	MFM-13
Dimension (HxWxD)mm		96 x 96 x 54	96 x 96 x 54
Panel Cutout mm		92 x 92	92 x 92
INPUT	Signal	3Ø4 Wire / 3Ø3 Wire / 1Ø2 Wire	
	Voltage	Primary : 100V to 520kv (Programmable), Secondary : 100V to 520V (L-L) (Programmable)	
	Current	Current : 5A to 6000A (Programmable), Secondary : 5A/1A (Programmable)	
PARAMETER	KW Total	0.000 - 9999 MW	0.000 - 9999 MW
	KW Per Phase	0.000 - 9999 MW	0.000 - 9999 MW
	WH Total	0.000 - 99999999 MWh	000.000 - 999999999.999 KWh
	Power Factor Average (PF)	0.100 - 1.000	0.100 - 1.000
	Power Factor Per Phase (PF)	0.100 - 1.000	0.100 - 1.000
	KVA Total	0.000 - 9999 MVA	0.000 - 9999 MVA
	VAH Total	0.000 - 99999999 MVAh	000.000 - 999999999.999 KVAh
	Frequency (Hz)	45 - 60Hz	45 - 60Hz
	KVAr Total	0.000 - 9999 MVar	0.000 - 9999 MVar
	Varh Total	000.000 - 99999999 MVarh	000.000 - 999999999.999 KVarh
	Load Hours	9999.59 Hrs/Min.	9999.59 Hrs/Min.
	NO Load Hours	9999.59 Hrs/Min.	9999.59 Hrs/Min.
	RPM	3600 RPM @ 60Hz & 2 Pole	3600 RPM @ 60Hz & 2 Pole
COMMUNICATION		RS-485 Modbus (Optional) Pulse Output	
Accuracy		Class 0.5	
Supply		100 to 270V AC/DC (SMPS) , 50/60Hz	

Power & Energy Meters

3 Phase Energy & Power Meter



Model	EPM-14		EM-10	EM-1P
Dimension (HxWxD)mm	96 x 96 x 54		96 x 96 x 43	96 x 96 x 43
Panel Cutout mm	92 x 92		92 x 92	92 x 92
INPUT	Signal	3Ø4Wire		1Ø2 Wire
	Voltage	30 to 300V AC (L-N) / 50 to 520V AC (L-L)		30 to 300V AC (L-N)
	Current	5/5 to 9999A AC CT Ratio Selectable		5/5 to 9999A AC
Measuring Range	Reset	KWH Reset by front key	By front keypad	Reset by front key
		0.000 to 9999 KW (Active Power) 0 to 99999999 KWH (Active Energy)	0.000 TO 9999 KW 0 to 99999999 KWH (Active Energy)	0.000 TO 9999 KW 0 to 99999999 KWH (Active Energy)
	Accuracy	Class 1.0		
Supply	100 to 270V AC/DC (SMPS) , 50/60Hz			
Note	Optional RS-485 Modbus available in EPM-14, EM-10 & EM-1P 2 Relay available in only EPM-14 as per request			

3 Phase and 1 Phase Panel Meter

VAF METER



Model	AVF-29T		AVF-19D	AVF-133
Dimension (HxWxD)mm	72 x 72 x 45		96 x 96 x 43	96 x 96 x 54
Panel Cutout mm	68 x 68		92 x 92	92 x 92
INPUT	Signal	3Ø4Wire / 3Ø3 Wire / 1Ø2 Wire		3Ø4Wire / 3Ø3 Wire / 1Ø2 Wire
	Voltage	Primary PT : 100V to 520KV Secondary PT : 50 to 520V AC (L-L)	30 to 300V AC (L-N) 50 to 520V AC (L-L)	30 to 300V AC (L-N) 50 to 520V AC (L-L)
	Current	Primary CT : 9999A Secondary CT : 5A/ 1A	Primary CT : 9999A Secondary CT : 5A	Primary CT : 9999A Secondary CT : 5A
PARAMETER	Voltage (L-L)	Average Voltage (L-N)		Average Voltage (L-N)
	Voltage (L-N)	Average Voltage (L-L)		Average Voltage (L-L)
	Average Current (L1,L2 & L3)	Frequency		Frequency
	Line Current (L1,L2 & L3)	Load Hour / No Load Hour		Load Hour
	Phase Sequence	RPM		RPM
Accuracy	Class 0.5		Class 0.5	Class 0.5
Supply	100 to 270V AC/DC, 50/60Hz		230V AC ±20%,50Hz	100 to 270V AC/DC, 50/60Hz
Note	RS-485 Modbus Available in AVF-133 as per request			

Power & Energy Meters

3 Phase Ampere Meter



Model	AMP-19	AMP-13	AMP-23
Dimension (HxWxD)mm	96 x 96 x 43	96 x 96 x 43	72 x 72 x 45
Panel Cutout mm	92 x 92	92 x 92	68 x 68
INPUT	Current	0.1A to 5A Primary : 5A to 9999A AC CT Selection Secondary : 5A	
	Accuracy	Class 0.5	
	Supply	230V AC $\pm 20\%$, 50Hz	
	Note	RS-485 Modbus is available in AMP-13	

3 PHASE VOLT METER



Model	VOLT-19	VOLT-13	VOLT-23
Dimension (HxWxD)mm	96 x 96 x 43	96 x 96 x 43	72 x 72 x 36
Panel Cutout mm	92 x 92	92 x 92	68 x 68
INPUT	Voltage	50 to 520V AC (L-L) Primary : 100 to 999KV (L-L) (Selectable) Secondary : 100 to 520V AC (L-L) (Selectable)	
	Accuracy	Class 0.5	
	Supply	100 to 270V AC/DC (SMPS) , 50/60Hz	

Power & Energy Meters

Single Phase AC Panel Meter

VOLT / AMP METER



Model	AV-14/11V	AV-24/21V	AV-34/31V	AV-41CT/41A/41V
Dimension (HxWxD)mm	96 x 96 x 43	72 x 72 x 36	48 x 96 x 26	48 x 48 x 46
Panel Cutout mm	92 x 92	68 x 68	46 x 92	45 x 45
INPUT	Ampere (AC)	5A AC Direct		
	CT Ratio	Primary : 5/5A to 4000/5A AC		
	Voltage (AC)	10 to 500V AC		
Accuracy		Class 0.5		
Supply		230V AC $\pm 20\%$, 50Hz	100 to 270V AC	230V AC $\pm 20\%$, 50Hz
Note		30A Direct CT Available at back side (AV-11A, AV-21A, AV-31A, AV-41A)		

Single Phase AC Panel Meter

VOLT + AMP METER



Model	AV-12	AV-22	AV-33	AV-44
Dimension (HxWxD)mm	96 x 96 x 43	72 x 72 x 36	48 x 96 x 68	48 x 48 x 66
Panel Cutout mm	92 x 92	68 x 68	46 x 92	45 x 45
INPUT	Current	Primary : 5/5A to 2000/5A AC		
	Voltage	10 to 500V AC		
Accuracy		Class 0.5		
Supply		100 to 270V AC/DC		
Note		30A Direct CT Available at back side		

Power & Energy Meters

DC Panel Meter VOLT / AMP METER



Model	AV-14DA/14DV	AV-24DA/24DV	AV-34DA/34DV	AV-41DV
Dimension (HxWxD)mm	96 x 96 x 43	72 x 72 x 60	48 x 96 x 26	48 x 48 x 70
Panel Cutout mm	92 x 92	68 x 68	46 x 92	45 x 45
INPUT	Ampere (DC)	-999 to 9999 Ampere DC Through 50mV, 60mV & 75mV DC External Shunt		
	Voltage (DC)	-20.0 to +20.00V DC / -50.0 to +50.0V DC/ -100 to +100.0V DC/ -200 to +200.0V DC/ -750 to +750V DC		
	Accuracy	±1% of Full Range ±1 Count		
	Supply	100 to 270V AC/DC, 50/60Hz		
	Note	0 to 2A DC / 5A DC / 10A DC / 20A DC Direct Through Shunt is Available in Model AV-14DZ,24DZ,34DZ		

SINGLE PHASE AC PANEL METER




Model	PF-11/PF-13	WM-11	FRQ-11
Dimension (HxWxD)mm	96 x 96 x 54	96 x 96 x 43	96 x 96 x 43
Panel Cutout mm	92 x 92	92 x 92	92 x 92
INPUT	Signal	1Ø2 Wire	1Ø2 Wire
	Voltage	20 to 300V / 50 to 520V	300V AC (L-N)
	Current	5A AC (CT Selection 5-9999A)	0.5 to 5Amp (CT Selection 5 - 9999A)
	CT Selection	5A AC	5A
	Secondary Function		
	Measuring Range	-1 to +1.000 PF	0 to 9999 Kilo Watt
	Accuracy	Class 0.5	50.0Hz
	Supply	100 to 270V AC/DC, 50/60Hz	Class 0.5
	Note	Also Available in 199.9 Watt Range 1 Relay on KW is Available in WM-11	230V AC ±20%, 50Hz

Power & Energy Meters

DC Panel Meter

VOLT / AMP METER

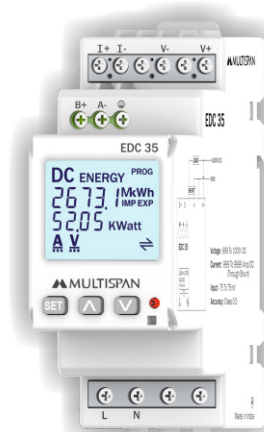

Model		MFM-142DC-M1	EDC-35
Dimension (HxWxD)mm		96 x 96 x 54	90 x 35 x 72
Panel Cutout mm		92 x 92	DIN Rail Mounting
INPUT	Ampere (DC)	-999 to 9999A DC Through -75mV to 75mV DC External Shunt	-999 to 1000V DC
	Voltage (DC)	-1500 to 1500V DC	-999 to 9999 kW DC
	Watt (DC)	-999 to 9999 kW DC	Import kWh : 0.000 to 99999 MWh
	kWh	0 to 999999 kWh	Export kWh : 0.000 to 99999 MWh
OUTPUT		2 Relay 1C/O 5A,230V AC (Resistive Load)	RS-485 Modbus Communication
Accuracy		±0.5% of Full Range ±1 Count	
Power Supply		100 to 270V AC/DC (SMPS) , 50/60Hz	
Note		RS-485 Modbus available in MFM-142DC as per request	



Model		DC-14	DC-24	VAW-34DC
Dimension (HxWxD)mm		96 x 96 x 54	72 x 72 x 45	48 x 96 x 26
Panel Cutout mm		92 x 92	68 x 68	46 x 92
INPUT	Ampere (DC)	-999 to 9999A DC Through -75mV to 75mV DC External Shunt		0 to 9999A DC Through 0 to 75mV DC External Shunt
	Voltage (DC)	0 to 1000V DC		0 to 1000V DC
	Watt (DC)	0000 to 9999 KWh DC		0000 to 9999 KW DC
Accuracy		±1% of Full Range ±1 Count		
Power Supply		100 to 270V AC/DC (SMPS) , 50/60Hz		
Note		RS-485 Modbus available in DC-14 & DC-24		

Power Supplies

10W to 240W



Model	Rated Power	Rating		Input	Efficiency
		Volt	Amp		
PS24-10A	240W	24V DC	10A	100 - 270V AC	>93%
PS24-6.5A	156W	24V DC	6.5A	100 - 270V AC	>90%
PS24-5A	120W	24V DC	5A	100 - 270V AC	>89%
PS48-2.5A	120W	48V DC	2.5A	100 - 270V AC	>89%
PS12-8A	96W	12V DC	8A	100 - 270V AC	>85%
PS24-2.5A	60W	24V DC	2.5A	100 - 270V AC	>89%
PS12-5A	60W	12V DC	5A	100 - 270V AC	>85%
PS15-8A	120W	15V DC	8A	100 - 270V AC	>86%
PS24-1.5A	36W	24V DC	1.5A	100 - 270V AC	>85%
PS24-1A	24W	24V DC	1A	100 - 270V AC	>85%
PS12-2A	24W	12V DC	2A	100 - 270V AC	>85%
PS24-0.83A	20W	24V DC	0.83A	110V AC/DC	>86%
PS12-1A	12W	12V DC	1A	100 - 270V AC	>85%
PS10-1A	10W	10V DC	1A	100 - 270V AC	>86%

Jumbo Displays

Jumbo Display Indicators

Single & Double Side



8" Display



4" Display

Model		PTC-8004 (Single Side)	PIC-6004A / UTI-6004 / MPM-6004
Dimension (HxWxD)mm		325 x 650 x 50	Dual Side : 165 x 392 x 75, Single Side: 165 x 392 x 55
INPUT	Input	0 - 10V DC / 4 - 20mA DC / 0 - 20mA DC (Configurable), Pulse through encoder / Proximity (Factory set) J / K / PT-100 2 Wire 3 Wire (Configurable), Rs-485 Modbus (Master Slave Selectable)	
	Range	J (0° to 400°C), K (0° to 1200°C), PT-100 2Wire or 3 Wire (-99.9° to 400.0°C) (-999 to 9999, 0 to 9999 Count For Analog Input)	
OUTPUT	Output1	2 Relay For Alarm Output (Optional)	
	Output2	24@30mA DC Transmitter Supply For analog Input (Optional)	
Accuracy		±0.5% of Full Scale	
Power Supply		100 to 270V AC (SMPS), 50/60Hz / 24V DC (Factory Set)	
Note		1) For Analog Input Input Model : PIC-6004A / PIC-3004A / PTC-8004 2) For Proximity Input Model : PC-6004 / MPM-6004 / RPM-6004 / MSI-3004 / UTR-6004 3) For Temperature Input Model : UTI-3004 / UTI-6004	

PROGRAMMABLE JUMBO DISPLAY COUNTER

4" Display




Model		PC-6006 (Single Side)
Dimension (HxWxD)mm		165 x 577 x 55
DISPLAY		Single Display : 7 Segment, 6 Digit, 4" Red Led Display
INPUT	Start Pulse	NPN / PNP Proximity Switch & Micro Switch (Configurable)
	Range	0 - 999999 Count
OUTPUT		1 Relay 1C/O 5A, 230V AC (Resistive Load) or SSR Drive O/P 12V DC, 20mA (Optional)
Memory		Non - Volatile Memory
Reset		Auto / Manual Reset / Back Reset
Supply		100 to 270V AC (SMPS), 50/60Hz, 24V DC
Note		RS-485 Input Available as per request (Master Slave Selectable)

Jumbo Displays

Humidity + Temperature Controller

2.25" Display

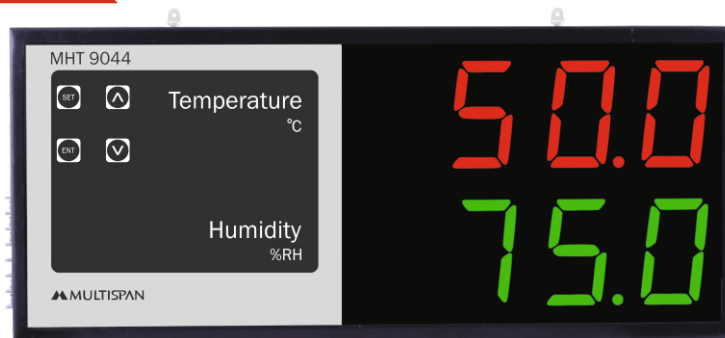

Model		MHT-9044 (Humidity + Temperature Controller)
Dimension (HxWxD)mm		165 x 392 x 55
DISPLAY		Upper Display : 7 Segment, 4 Digit, 2.25" Red Led Display - Temperature Lower Display : 7 Segment, 4 Digit, 2.25" Green Led Display - Humidity
INPUT	Sensor	S-1 : PT-100 2 Wire or 3 Wire (RTD) S-2 : Humidity Sensor
	Range	PT-100 2 Wire o 3 Wire (-99 °C to 400 °C), Humidity Sensor (0.0 to 100.0% RH)
OUTPUT		1 st Relay For Temperature and 2 nd Relay For Humidity
Control Action		ON-OFF
Accuracy		±1% of FSD
Power Supply		100 to 250V AC (SMPS), 50/60Hz

PROGRAMMABLE JUMBO LENGTH COUNTER

2.25" Display



Model		LC-9004
Dimension (HxWxD)mm		165 x 392 x 55
DISPLAY		Upper Display : 7 Segment, 6 Digit, 2.25" Red Led Display - Total Meters Lower Display : 7 Segment, 4 Digit, 2.25" Green Led Display - Meter Per Minute
INPUT	Start Pulse	NPN / PNP Proximity Switch / Micro Switch (Configurable) or Encoder (Factory Set)
	Range	0 - 99999.9 / 0 - 999999 Meter (Configurable)
OUTPUT		1 Relay 1C/O 5A,230V AC (Resistive Load) or SSR 12V max 20mA DC Output (Any One Factory Set)
MPM Range		999.9 MPM
Diameter		0 - 9999.99 MM
Memory		Non - Volatile Memory
Reset		Auto Reset / Manual Reset Facility & Front and Back Reset Facility
Supply		100 to 270V AC (SMPS), 50/60Hz
Note		RS-485 Input / Output Available as per request

Jumbo Display Model Selection Guide



Sr. No	Product Model	Display Digit	Input	Display Parameter
1	PIC-6004A	4	4-20mA/0-10V/0-20mA DC	Process Value (-999 to 9999)
2	UTI-6004	4	J / K / PT-100	Temperature
3	PTC-6004	4	4-20mA/0-10V/0-20mA DC/ J / K / PT-100	Process Value (-999 to 9999)/ Temperature
4	PC-6004	4	NPN / PNP Proximity	Count
5	RPM-6004	4	NPN / PNP Proximity	RPM
6	MPM-6004	4	NPN / PNP Proximity	MPM
7	RS-6004	4	RS-485	Numeric Value
8	LC-9004	6 + 4	NPN / PNP Proximity	Total Length & MPM
9	MHT-9044	4 + 4	PT-100 + RH Sensor	Temperature & Humidity
10	PC-6006	6	NPN / PNP Proximity	Count
11	RS-6006	6	RS-485	Numeric Value
12	PTC-8004 (8 Inch Display)	4	4-20mA/0-10V/0-20mA DC J / K / PT-100	Process Value (-999 to 9999)/ Temperature

IIoT Solution

Data logging on cloud



Built in Wireless Module

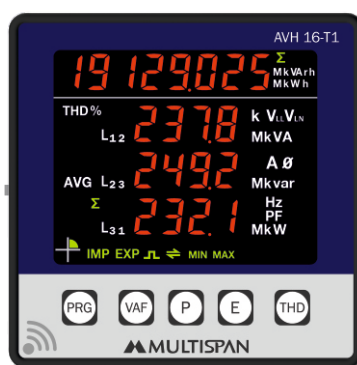
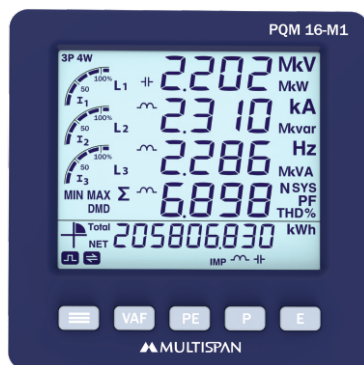


Gateway Modules



RS-485
Modbus

Web application



Secured
Cloud Storage

Worldwide Presence



Asia

Bahrain
Indonesia
Iraq
Jordan
Kuwait
Malaysia
Maldives
Myanmar
Oman
Qatar
Saudi Arabia
Singapore
Syria
Thailand
UAE
Vietnam

Africa

Botswana
Egypt
Kenya
Lebanon
Namibia
Nigeria
South Africa
Tunisia
Uganda

America & Oceania

Australia
Chile
Mexico



Technical specifications & product variations are subject to change (Ver. 2025-01)



JHB Branch

Mimic Components, Address: 5 Ramsay Street, Booysens, 2091, Johannesburg. Switchboard: +27(0)11-689-5700 | WhatsApp: 071-979-9999
PO Box 38493, Booysens, 2016, Johannesburg, South Africa. Email: info1@mimiccomponents.co.za | Website: www.mimiccomponents.co.za

Cape Branch

Mimic Cape. Address: Unit 41A, Stella Park, 57 Stella Road, Montague Gardens, 7441, Cape Town. Switchboard: +27(0)21-551-8185
WhatsApp: 071-979-9999. Po Box 36955, Chempet, 7442, Cape Town, South Africa. Email: info@mimic-cape.co.za | Website: www.mimic-cape.co.za