

PFLC-68

Fully Pneumatic Packaging Controller



Features

- Touch Screen
- RTC Facility
- Field operated used friendly menu for device configuration
- With password protected resetting

Specification

Input	Clutch Proxy (PNP) Unwinding Motor Start Proxy (NPN) Eye Mark Sensor Proxy
Relay Output	RLY-1 Horizontal seal RLY-2 Vertical seal RLY-3 Cutter RLY-4 Nitrogen fill RLY-5 Batch cutter RLY-6 Batch coding RLY-7 Auger RLY-8 Unwinding
Relay Type	(NO-C)
Relay Rating	5A,230V AC
Clutch & Break Output	24V DC
Power Supply	24V DC (6VA Max.)


Key

KEY	RESET
-----	-------

Dimension

Size	96 (H) x 96 (W) x 54 (D)
Panel Cutout	92 (H) x 92 (W)

Terminal Connection

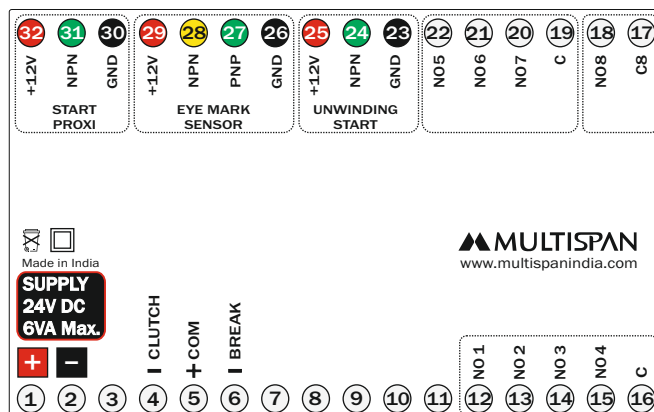

JHB Branch

Mimic Components, Address: 5 Ramsay Street, Booysens, 2091, Johannesburg. Switchboard: +27(0)11-689-5700 | WhatsApp: 071-979-9999
PO Box 38493, Booysens, 2016, Johannesburg, South Africa. Email: info1@mimiccomponents.co.za | Website: www.mimiccomponents.co.za

Cape Branch

Mimic Cape, Address: Unit 41A, Stella Park, 57 Stella Road, Montague Gardens, 7441, Cape Town. Switchboard: +27(0)21-551-8185
WhatsApp: 071-979-9999. Po Box 36955, Chempet, 7442, Cape Town, South Africa. Email: info@mimic-cape.co.za | Website: www.mimic-cape.co.za